



Totally Focused. Totally Independent.

Technical Guide

EC043 4 A



Dynamic Data Support

The world's largest
independent producer of
alternators 1 – 5,000kVA

Standards

Alternators are designed and produced within an ISO 9001 environment. The entire series is manufactured according to, and complies with, the most common specifications such as CEI 2-3, IEC 34-1, EN 60034-1, VDE 0530, BS 4999-5000, NF 51.111, CAN/CSA-C22.2 No14-95-No100-95, NEMA MG 1-2011, ISO 8528-3. Other standards such as UL1446, UL 1004/4 and /B are available on request.

Windings and Performances

All windings are 2/3rds pitch to eliminate triplen harmonics within the voltage waveform and to avoid excessive neutral currents in certain parallel operating conditions. A fully interconnected aluminium or copper damper cage is supplied on the rotor of all models (excluding the ECP3 series).


- ▶ 12 wire reconnectable:
50Hz – 380V to 440V and 220/110V to 240/120V (de-rates may apply at certain voltages)
60Hz – 380V to 480V and 220/110V to 240/120V (de-rates may apply at certain voltages)
- ▶ 6 wire reconnectable:
50Hz – 380V to 440V and 220V to 240V (de-rates may apply at certain voltages)
60Hz – 380V to 480V and 220V to 240V (de-rates may apply at certain voltages)

Winding Configurations	Standard		Special (dedicated)			
	12 wire Reconnectable	6 wire Reconnectable	380V and 600V 60Hz	690V 50/60Hz	220-240V 1ph 50Hz	220-240V 1ph 60Hz
ECP3 to ECO38	Std	Option	Option	Option	Option	Option
ECO40 to ECO46	Std	Option	Option	Option	Option (to ECO40)	Option (to ECO40)
Insulation materials	Class H	Class H	Class H	Class H	Class H	Class H
High efficiency	Std	Std	Std	Std	Std	Std
High motor starting	>300%	>300%	>300%	>300%	>300%	>300%
THD (Total Harmonic Distortion)	Typically <3.5% full load L-L	Typically <3.0% full load L-L	Typically <3.5% full load L-L	Typically <3.5% full load L-L	Typically <4.5% full load L-N	Typically <4.5% full load L-N
Interference suppression	VDE 0875 G/N/K, EN61000-6-3, EN61000-6-2, others available on request					

Winding Protection

There are various degrees of protection for the windings following the standard impregnation process, as can be seen here. The TOTAL+ butadienic black flexible coating is recommended for arduous applications.

Winding Protection:	STANDARD	STANDARD+	GREY	GREY+	TOTAL+ (3% de-rate may apply on certain models)
ECP3	Std	Option	Option	Option	Option
ECP28,NPE32 and ECP32	-	Std	Option	Option	Option
ECP34 to ECO46	-	-	Std	Option	Option

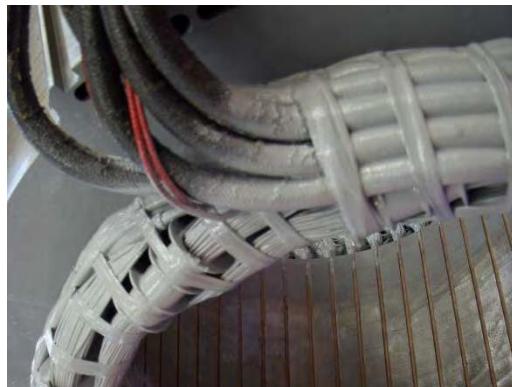

Grey treatment (marinization) on the left, TOTAL+ treatment shown on the right. The EG43 grey varnish, is an high temperature insulating enamel that forms a tough and flexible film, with excellent moisture and chemical protection. It is water and oil proof, and also protects windings from abrasion. It is applied spraying an over coating layer over the impregnated winding, or dipping the stator in a varnish barrel for superior treatments

The TOTAL+ is a protection system that makes Mecc Alte special. It is the ultimate winding treatment that offers truly superior performances when the environment is really harsh, or the application very demanding. It is a rubbery protection treatment, used to replace epoxies and silicones winding encapsulation. The TOTAL+ flexible black compound cures to a tough, resilient, glossy black thick coating that seals the copper against moisture and chemical attacks. Due to its encapsulation capability and flexibility, is also extremely resistant to the particle abrasion as it adsorbs the impacts. Moreover, the high flexibility leads to a long-trouble less life protection, as the compound follows elastically the thermal expansion cycles of the windings from the cold to the hot condition and vice versa without forming any cracks.

Protection for Environment

In addition to protection on the windings themselves, the alternators can have increased ingress protection. Standard levels are IP23 with further upgrades available to include inlet filters, IP43 and IP45: 7% de-rates apply on inlet filters and IP43 protection. 20-30% de-rates apply for IP45 depending on alternator model.

Additional air exit louvres (called IP23+) are optionally retrofittable in the overall ECP32 to ECO 46 range, in order to comply to the most strict marine regulations.



Construction

The robust mechanical structure withstands up to 5G in any direction and 9G vertically and its design permits easy access to the connections and components during routine maintenance check-ups. The mechanical design has used the most advanced FEM techniques. The materials used are: FEP12 steel for the frame, C45 steel for the shaft and cast iron or aluminum pressure die cast for the end-brackets: fans are aluminum die casted either nylon fiber glass loaded, UL compliant materials. Rotors are dynamically balanced according grade 2.5 of ISO 1940-1.

Terminals and Terminal Box

Easy access to regulators is assured through a pull out drawer or a drop down panel to allow safer adjustment. Large terminal boxes allow easy access of power cables, in the ECO43 and ECO46 higher power ranges the terminal allow the convenient choice of power cable or busbar connection with versatility of entry and connection. Current transformers are available as an option on series ECO 40, 43 and 46 with single or dual output.



Excitation and Regulation Systems

All ECP/ECO series have MAUX auxiliary winding to power the digital regulator. Both DSR and the DER1 are available to connect to PC through the DxR2 USB interface and DxR TERMINAL software to interrogate/download alarms & settings for analysis or for cloning other regulators. DER2 has got an integrated USB connection and can be connected to the PC without any optional connection boards. More settings such as LAMS, digital RAM based synchronous external control and soft start are obtainable through the DxR connection. Simple analogue potentiometers are available for the more usual adjustments.

Excitation Systems	DSR	DER1	DER2
ECP3 to ECO38	Std	Option	Option
ECO40 to ECO46	-	Std	Option
Parallel Operation	✓	✓	✓
Mains Parallel	✓	✓	✓
3 Phase Sensing (rms)	-	✓	✓
Accuracy	+/-1%	+/-0.5%	+/-0.5%
Remote Voltage Control	✓	✓	✓
Alarm Log	✓	✓	✓
Analogue and Digital Configurable	✓	✓	✓
LAMS (Load Acceptance V/f)	✓	✓	✓
APO (Active Protection Output)	✓	✓	✓
Soft Start	✓	✓	✓
High dynamic response	-	-	✓
USB connection without external boards	-	-	✓

For a given motor start duty a smaller machine may be selected – also enhanced by low sub-transient reactance values for non-linear loads. The whole range from 6.5 to 3400kVA is capable of >300% sustained short circuit current for up to 20 seconds.

Optional PMG3

PMG3 can be retro fit or factory fit on ECO 40, 43 and 46 series. This smart MeccAlte design allows an easy fix kit, through a tapered cone coupling and a simple replacement of the rear air louvre. PMG3 is also available on ECO 38, when ordered from the factory.

The complete AVR range is fully compatible with both MAUX and PMG3 systems, this minimises spare part management and flexibility of stock as one AVR suits all applications. The PMG3 is delivering the same amount of kVA available with the MAUX.



Accessories

Additional optionals can be fit on our alternator series, such as PTC thermistors or PT100 both on windings and bearings, space heaters, high and low profile of terminal boxes (on most series), air filter clogging sensors, rotating diode bridge failure sensor (RBD), power factor controller for parallel operation (PFR/2), parallel devices (standard from ECO 40), air filters, IP43 and IP45 protections, marine IP23 + protection for SOLAS requirements and many others.

Deration coefficients

		Ambient temperature (Celsius)					
Altitude (meters)		25	40	45	50	55	60
≤ 1000		1.07	1	0.96	0.93	0.91	0.89
> 1000 ≤ 1500		1.01	0.96	0.92	0.89	0.87	0.84
> 1500 ≤ 2000		0.96	0.91	0.87	0.84	0.83	0.79
> 2000 ≤ 3000		0.9	0.85	0.81	0.78	0.76	0.73

Notes on short circuit curves

The indicated coefficients have to be used to correct the three phase short circuit curves values as a function of the rated voltage.

50 Hz		60 Hz	
Voltage	Factor	Voltage	Factor
380	0.93X	415	0.85X
400	1X	440	0.90X
415	1.04X	460	0.95X
440	1.10X	480	1X

The indicated coefficient have to be used to correct the three phase short circuit curves values as a function of the type of short circuit voltage.

	3 phase	2 phase L-L	1 phase L-N
Instantaneous	1X	0.87X	1.30X
Minimum	1X	1.80X	3.20X
Sustained	1X	1.50X	2.50X
Max Duration	20 sec.	10 sec.	4 sec.

All the curves are shown for series or parallel star connection at 400V 50 Hz or 480V 60 Hz. If the unit is reconnected from series to parallel star, the additional coefficient is 2X. From series star to series delta, it is 1.72X. From series star to parallel delta, it is 3.44X.

General characteristics

Pole number	4	Insulation class	H
Phase number	3	Protection class	IP23
Number of wires	12	NDE Bearing type	6322
Execution	Brushless	DE Bearing type	6324
Regulator type	DER-1/A	Maximum Overspeed	2250
Winding pitch	2/3	Altitude	0-1000
Code voltage reference	T0405P3	Balancing	ISO1940-1

Ratings 50Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF																					
STANDBY-163/27							STANDBY-150/40			H-125/40			F-105/40		B-80/40						
Series Star Y	760V	800V	830V	880V	760V	800V	830V	880V	760V	800V	830V	880V	760V	800V	830V	880V					
Parallel Star YY	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V					
Series Delta Δ	440V	460V	480V	508V	440V	460V	480V	508V	440V	460V	480V	508V	440V	460V	480V	508V					
Parallel Delta ΔΔ	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V	220V	230V	240V	254V					
ECO43 1S4 A	kVA	900	900	900	815	840	840	840	790	800	800	800	750	730	730	730	663	640	640	640	600
	kW	720	720	720	652	672	672	672	632	640	640	640	600	584	584	584	530	512	512	512	480
ECO43 2S4 A	kVA	1016	1016	1016	907	975	975	975	870	930	930	930	830	850	850	850	770	744	744	744	664
	kW	813	813	813	726	780	780	780	696	744	744	744	664	680	680	680	616	595	595	595	531
ECO43 1M4 A	kVA	1038	1120	1120	1093	992	1070	1070	1044	950	1025	1025	1000	870	950	950	910	760	820	820	800
	kW	830	896	896	874	794	856	856	835	760	820	820	800	696	760	760	728	608	656	656	640
ECO43 2M4 A	kVA	1250	1250	1140	983	1200	1200	1096	940	1150	1150	1050	900	1050	1050	960	820	920	920	840	720
	kW	1000	1000	912	786	960	960	877	752	920	920	840	720	840	840	768	656	736	736	672	576
ECO43 2L4 A	kVA	1420	1420	1420	1349	1358	1358	1358	1290	1300	1300	1300	1235	1200	1200	1200	1140	1040	1040	1040	988
	kW	1136	1136	1136	1079	1086	1086	1086	1032	1040	1040	1040	988	960	960	960	912	832	832	832	790
ECO43 VL4 A	kVA	1520	1520	1440	-	1470	1470	1400	-	1400	1400	1330	-	1280	1280	1210	-	1120	1120	1064	-
	kW	1216	1216	1152	-	1176	1176	1120	-	1120	1120	1064	-	1024	1024	968	-	896	896	851	-

Ratings 60Hz

kVA / kW @ Temp. Rise / Ambient °C - 0.8 PF																					
STANDBY-163/27							STANDBY-150/40			H-125/40			F-105/40		B-80/40						
Series Star Y	830V	880V	920V	960V	830V	880V	920V	960V	830V	880V	920V	960V	830V	880V	920V	960V					
Parallel Star YY	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V	415V	440V	460V	480V					
Series Delta Δ	480V	504V	530V	554V	480V	504V	530V	554V	480V	504V	530V	554V	480V	504V	530V	554V					
Parallel Delta ΔΔ	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V	240V	254V	265V	277V					
ECO43 1S4 A	kVA	962	1050	1050	1050	924	1008	1008	1008	880	960	960	960	800	875	875	875	704	768	768	768
	kW	770	840	840	840	739	806	806	806	704	768	768	768	640	700	700	700	563	614	614	614
ECO43 2S4 A	kVA	1115	1159	1220	1220	1069	1111	1170	1170	1020	1060	1116	1116	935	969	1020	1020	816	850	893	893
	kW	892	927	976	976	855	889	936	936	816	848	893	893	748	775	816	816	653	680	714	714
ECO43 1M4 A	kVA	1147	1200	1290	1365	1117	1144	1227	1300	1050	1100	1180	1250	960	1000	1080	1140	840	880	944	1000
	kW	918	960	1032	1092	894	915	982	1040	840	880	944	1000	768	800	864	912	672	704	755	800
ECO43 2M4 A	kVA	1300	1420	1525	1525	1250	1357	1450	1450	1200	1300	1400	1400	1090	1200	1300	1300	960	1040	1120	1120
	kW	1040	1136	1220	1220	1000	1086	1160	1160	960	1040	1120	1120	872	960	1040	1040	768	832	896	896
ECO43 2L4 A	kVA	1585	1618	1700	1700	1516	1550	1630	1630	1451	1482	1560	1560	1339	1368	1440	1440	1161	1186	1248	1248
	kW	1268	1618	1360	1360	1213	1240	1304	1304	1161	1186	1248	1248	1071	1094	1152	1152	929	949	998	998
ECO43 VL4 A	kVA	1736	1824	1824	1824	1680	1765	1765	1765	1600	1700	1700	1700	1450	1540	1540	1540	1280	1360	1360	1360
	kW	1389	1459	1459	1459	1344	1412	1412	1412	1280	1360	1360	1360	1160	1232	1232	1232	1024	1088	1088	1088

Reactance & Time constants- Class H / 400V

Unsaturated (ref. EN60034-4)		EC043 1S4 A	EC043 2S4 A	EC043 1M4 A	EC043 2M4 A	EC043 2L4 A	EC043 VL4 A
X_d	Direct-axis synchronous reactance %	367	431	396,5	377	391	359,3
X'_d	Direct-axis transient reactance %	20	19,1	19,1	21,2	18,5	18,2
X"_d	Direct-axis subtransient reactance %	10,3	8,99	9,68	11	8,7	8,53
X_q	Quadrature-axis synchronous reactance %	157	177,5	173	160,4	181	120,3
X'_q	Quadrature-axis transient reactance %	157	177,5	173	160,4	181	120,3
X"_q	Quadrature-axis subtransient reactance %	22	22,3	21,3	21,2	19,9	19,1
X₂	Negative-sequence reactance %	16,2	15,7	15	16	14,2	12
X₀	Zero sequence reactance %	3,4	4,26	4,02	3,83	4,06	3,74
Saturated							
X_d	Direct-axis synchronous reactance %	304,6	357,7	329,1	312,9	324,5	298,2
X'_d	Direct-axis transient reactance %	16,6	15,8	15,8	17,6	15,4	15,1
X"_d	Direct-axis subtransient reactance %	8,55	7,46	8,04	9,11	7,22	7,08
X_q	Quadrature-axis synchronous reactance %	130,3	147,3	143,6	133,1	150,2	99,8
X'_q	Quadrature-axis transient reactance %	130,3	147,3	143,6	133,1	150,2	99,8
X"_q	Quadrature-axis subtransient reactance %	18,3	18,5	17,7	17,6	16,5	15,8
X₂	Negative-sequence reactance %	13,4	13	12,5	13,3	11,8	9,93
X₀	Zero sequence reactance %	3,4	4,26	4,02	3,83	4,06	3,74
K_{cc}	Short circuit ratio	0,5	0,33	0,26	0,35	0,38	0,29
T'_d	Transient time constant sec	0,225	0,234	0,24	0,245	0,271	0,31
T"_d	Subtransient time constant sec	0,018	0,017	0,017	0,018	0,018	0,022
T'do	Open circuit time constant sec	7,7	8,3	8,2	8,1	8,9	9,5
T_a	Armature time constant sec	0,02	0,022	0,023	0,024	0,026	0,032

Additional information - Class H / 400V

I₀	Excitation current at no load A	0,9	1,1	0,8	1,5	1,2	0,8
I_c	Excitation current at full load A	3,5	4,1	3,5	4,3	3,9	3,3
Overload		1 hour in a 5 hours period 110% rated load					
Overload per 20 sec. %		300					
Heat dissipation	W	32976	35874	38639	41338	43333	44241
Telephone Harmonic Factor - THF	%	<2	<2	<2	<2	<2	<2
Waveform Distors.(THD) full load LL/LN	%	2,8 / 2,6	2 / 2,3	1,9 / 2,2	1,5 / 1,7	1,5 / 1,5	1,7 / 1,6
Waveform Distors.(THD) no load LL/LN	%	3,1 / 3	2,7 / 2,9	2,5 / 2,7	2,1 / 2,1	2,4 / 2,4	2,6 / 2,5

Reactance & Time constants- Class H / 480V







Unsaturated (ref. EN60034-4)		EC043 1S4 A	EC043 2S4 A	EC043 1M4 A	EC043 2M4 A	EC043 2L4 A	EC043 VL4 A
X_d	Direct-axis synchronous reactance %	367	431	434,8	382,4	391	363,6
X'_d	Direct-axis transient reactance %	20	19,1	20,9	21,5	18,5	18,4
X"_d	Direct-axis subtransient reactance %	10,3	8,99	10,6	11,1	8,7	8,63
X_q	Quadrature-axis synchronous reactance %	157	177,5	189,7	162,7	181	121,7
X'_q	Quadrature-axis transient reactance %	157	177,5	189,7	162,7	181	121,7
X"_q	Quadrature-axis subtransient reactance %	22	22,3	23,4	21,5	19,9	19,3
X₂	Negative-sequence reactance %	16,2	15,7	16,5	16,3	14,2	12,1
X₀	Zero sequence reactance %	3,4	4,26	4,4	3,89	4,06	3,78
Saturated							
X_d	Direct-axis synchronous reactance %	304,6	357,7	360,9	317,4	324,5	301,8
X'_d	Direct-axis transient reactance %	16,6	15,8	17,3	17,9	15,4	15,3
X"_d	Direct-axis subtransient reactance %	8,55	7,46	8,81	9,24	7,22	7,16
X_q	Quadrature-axis synchronous reactance %	130,3	147,3	157,5	135,1	150,2	101
X'_q	Quadrature-axis transient reactance %	130,3	147,3	157,5	135,1	150,2	101
X"_q	Quadrature-axis subtransient reactance %	18,3	18,5	19,4	17,9	16,5	16
X₂	Negative-sequence reactance %	13,4	13	16,7	13,5	11,8	10,1
X₀	Zero sequence reactance %	3,4	4,26	4,4	3,89	4,06	3,78
K_{cc}	Short circuit ratio	0,5	0,33	0,25	0,35	0,38	0,29
T'_d	Transient time constant sec	0,225	0,234	0,24	0,245	0,271	0,31
T"_d	Subtransient time constant sec	0,018	0,017	0,017	0,018	0,018	0,022
T'do	Open circuit time constant sec	7,7	8,3	8,2	8,1	8,9	9,5
T_a	Armature time constant sec	0,02	0,022	0,023	0,024	0,026	0,032

Additional information - Class H / 480V

I₀	Excitation current at no load A	0,9	1,1	0,8	1,5	1,2	0,8
I_c	Excitation current at full load A	3,5	4,1	3,5	4,3	3,9	3,3
Overload		1 hour in a 5 hours period 110% rated load					
Overload per 20 sec. %		300					
Heat dissipation	W	37876	39150	42753	46667	46606	47867
Telephone Interference Factor - TIF		<40	<40	<40	<40	<40	<40
Waveform Distors.(THD) full load LL/LN	%	2,8 / 2,6	2 / 2,3	1,9 / 2,2	1,5 / 1,7	1,5 / 1,5	1,7 / 1,6
Waveform Distors.(THD) no load LL/LN	%	3,1 / 3	2,7 / 2,9	2,5 / 2,7	2,1 / 2,1	2,4 / 2,4	2,6 / 2,5


Efficiencies @ 50Hz

Models		380V 50Hz					400V 50Hz					415V 50Hz					440V 50Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
ECO43 1S4 A	%	92,0	94,0	95,6	95,2	95,0	92,0	93,9	95,3	95,1	95,0	91,8	93,9	95,4	94,9	94,5	90,9	93,3	95,0	94,5	94,2
ECO43 2S4 A	%	92,0	94,5	95,8	95,5	95,3	92,0	94,4	95,7	95,4	95,2	91,8	94,3	95,5	95,2	95,0	91,3	94,1	95,6	95,0	94,7
ECO43 1M4 A	%	92,2	94,7	95,9	95,6	95,3	92,3	94,6	95,8	95,5	95,3	91,9	94,5	95,6	95,3	95,0	91,4	94,3	95,7	95,1	94,7
ECO43 2M4 A	%	92,0	94,9	96,3	95,8	95,5	92,0	94,8	96,0	95,7	95,5	91,8	94,9	96,1	95,5	95,2	91,3	94,5	95,9	95,3	94,9
ECO43 2L4 A	%	92,0	95,1	96,5	96,1	95,8	92,0	95,0	96,2	96,0	95,8	91,8	94,9	96,2	95,8	95,5	91,3	94,6	96,1	95,6	95,3
ECO43 VL4 A	%	92,1	95,4	96,7	96,3	96,0	92,1	95,3	96,4	96,2	96,0	91,9	95,2	96,4	96,0	95,7	-	-	-	-	-

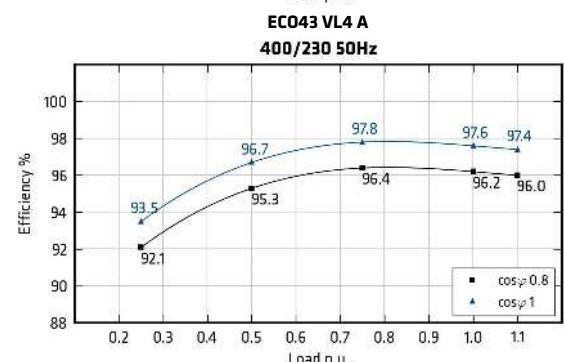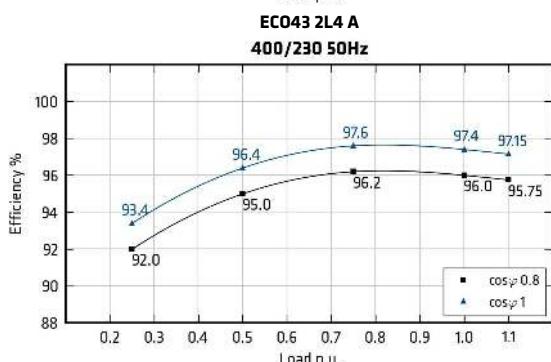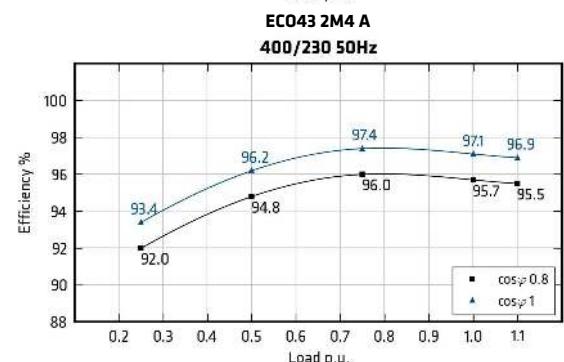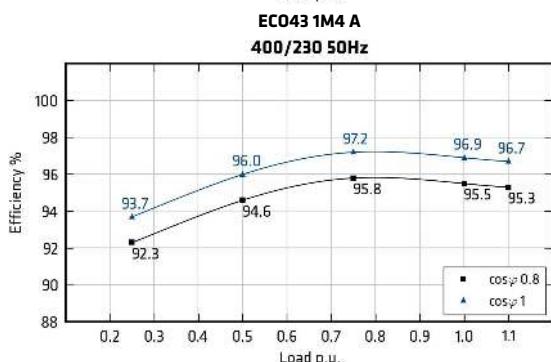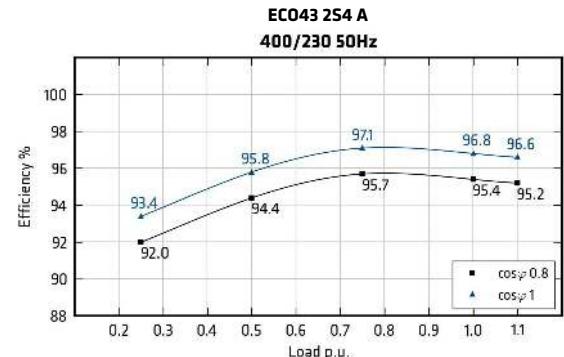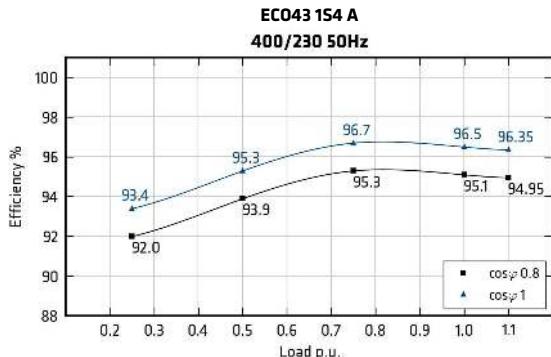


Efficiencies @ 60Hz

Models		415V 60Hz					440V 60Hz					460V 60Hz					480V 60Hz				
		0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1	0.25	0.5	0.75	1	1.1
ECO43 1S4 A	%	92,9	94,2	95,3	94,7	94,5	93,0	94,3	95,5	95,2	94,6	93,0	94,5	95,9	95,4	95,1	93,0	94,4	95,6	95,3	95,0
ECO43 2S4 A	%	93,0	94,5	95,4	95,2	95,0	93,0	94,6	95,6	95,7	95,6	93,0	94,8	96,0	95,9	95,8	93,0	94,7	95,8	95,8	95,6
ECO43 1M4 A	%	93,1	94,6	95,5	95,4	95,1	93,2	94,7	95,8	95,9	95,7	93,5	94,9	96,2	96,1	95,9	93,4	94,8	96,0	95,9	95,7
ECO43 2M4 A	%	93,0	94,9	95,8	95,5	95,3	93,0	95,0	96,1	96,0	95,8	93,0	95,2	96,3	96,2	96,0	93,0	95,1	96,1	96,0	95,8
ECO43 2L4 A	%	92,5	95,0	96,1	95,8	95,5	92,5	95,1	96,3	96,3	96,1	92,5	95,3	96,7	96,5	96,2	92,5	95,2	96,5	96,4	96,2
ECO43 VL4 A	%	92,4	95,2	96,3	96,0	95,7	92,4	95,3	96,5	96,5	96,3	92,4	95,5	96,9	96,7	96,4	92,4	95,4	96,7	96,6	96,4

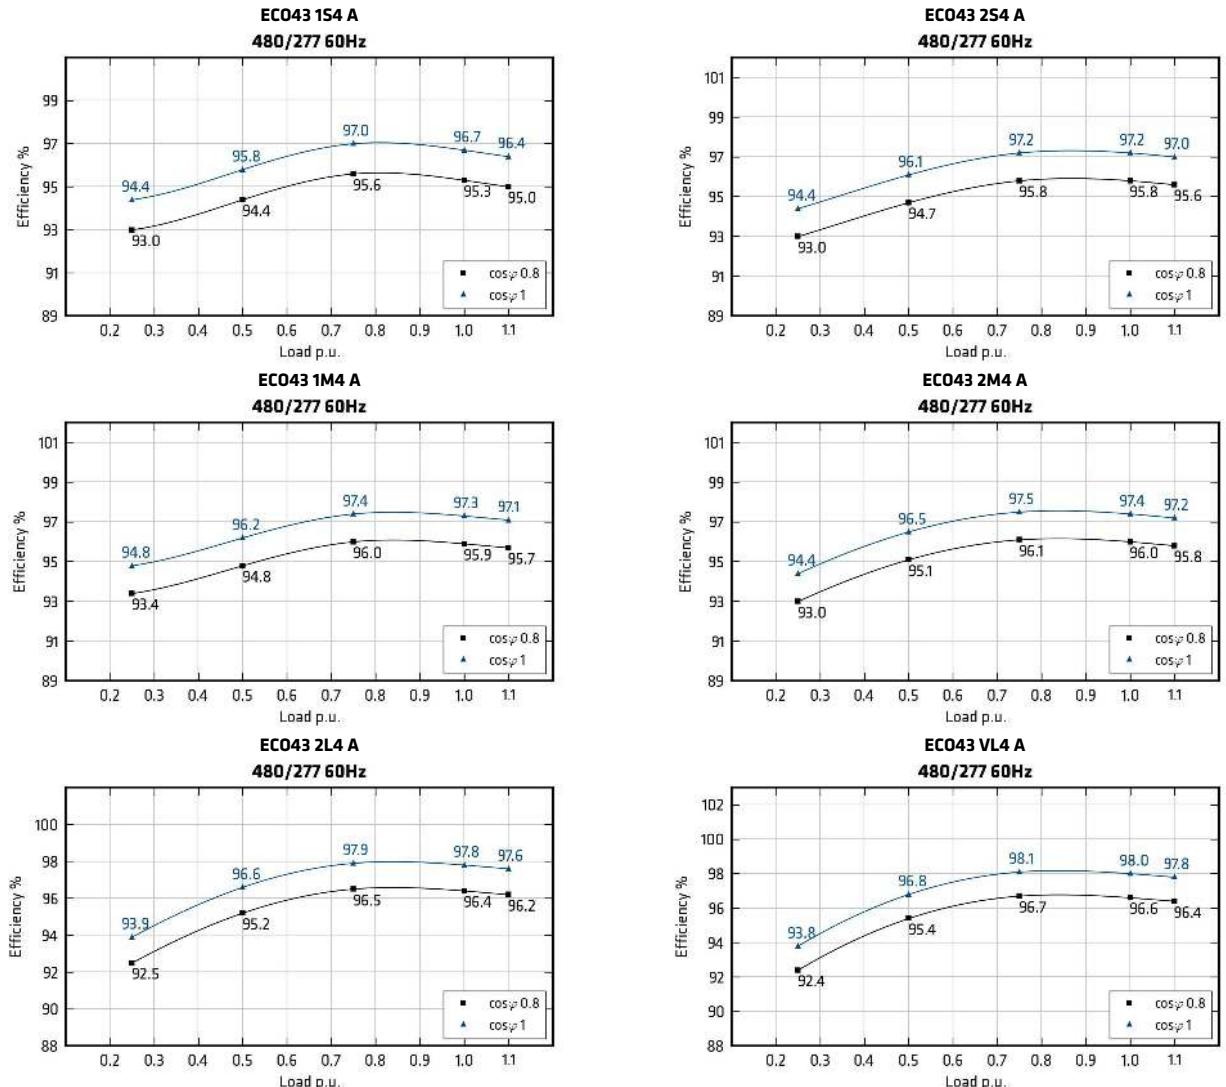

Transients voltage

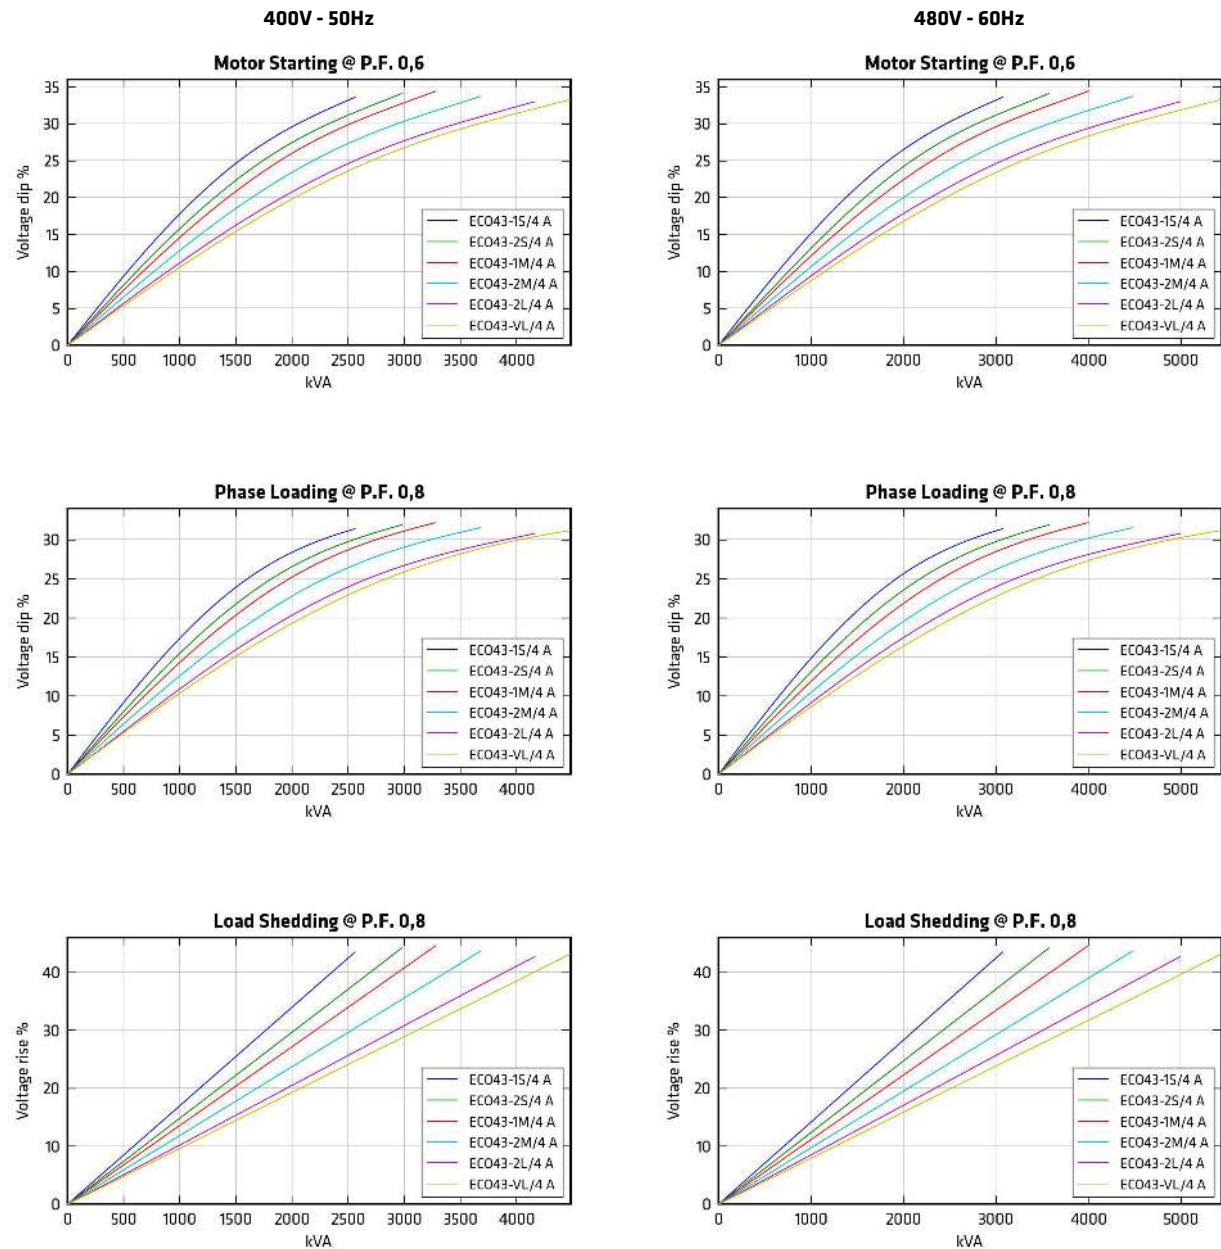

In order to scale transient curves as a function of a power factor or voltage if not indicated, please proceed as follows:

Power Factor coefficient corrector (PFCC), to be used on power factor 0.6 curves:

$$\text{PFCC} = \sin(\text{ARCcos(PFnew)}) / 0.8$$

Example. The PFCC at power factor 0.3 is 1.192 [$\text{PFCC} = \sin(\text{ARCcos}(0.3)) / 0.8$]. This means that the voltage fall at a given power at pf 0.3 is equivalent to the one that can be read on the pf 0.6 curve if the load is considered 1.192 times bigger (19% higher value.).

In this example, a 100 kVA load insertion at pf 0.3 is equivalent in voltage fall to a 119 kVA load insertion at pf 0.6.

Voltage coefficient corrector (VCC):


$$\text{VCC} = (400/\text{Vnew})^2 \text{ if } 50 \text{ Hz; } \text{VCC} = (480/\text{Vnew})^2 \text{ if } 60 \text{ Hz}$$

Example. VCC at 415V 60 Hz is 1.338 [$\text{VCC} = (480/415)^2$]. This means that the voltage fall at a given power at 415V is equivalent to the one that can be read on the power factor 0.6 curve if the load is considered 1.338 times bigger (33% higher value.).


In this example, a 100 kVA load insertion at 415V is equivalent in voltage fall to a 133 kVA load insertion at 480V.

50Hz Short circuit decrement curves - No load excitation at rated speed


ECO43 1S4 A

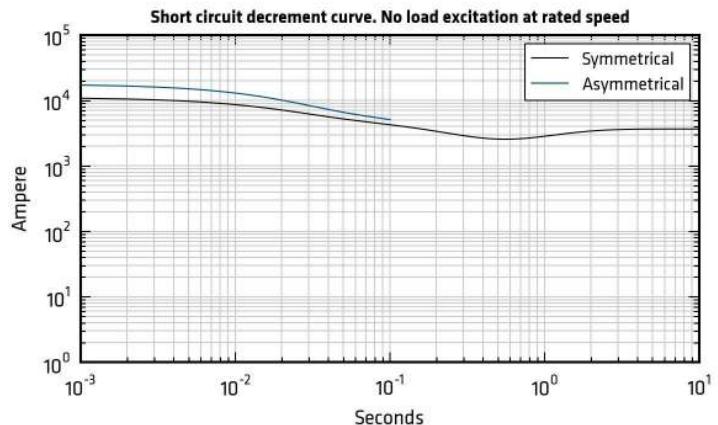


ECO43 2S4 A

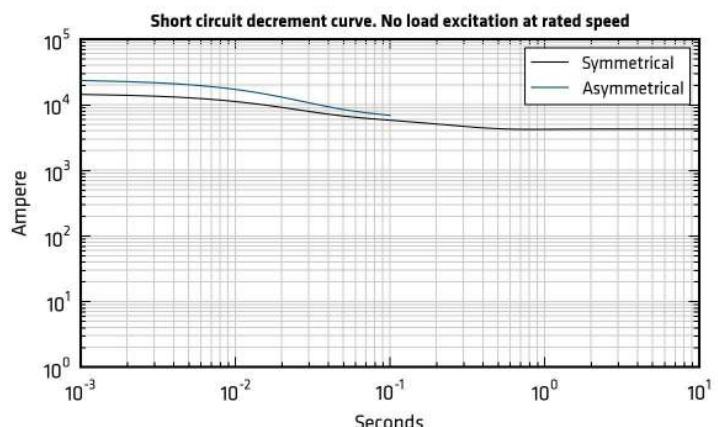

ECO43 1M4 A

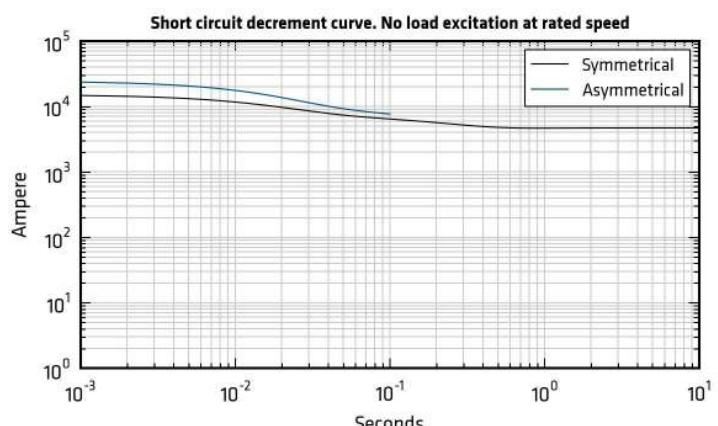


ECO43 2M4 A

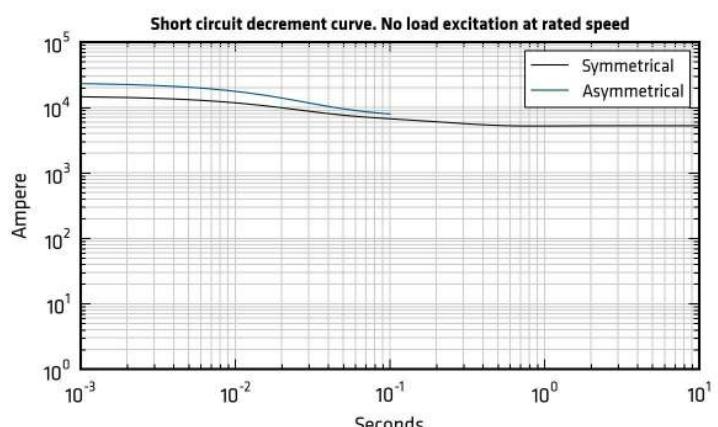


*Please refer to tables at page 6

50Hz Short circuit decrement curves - No load excitation at rated speed

ECO43 2L4 A

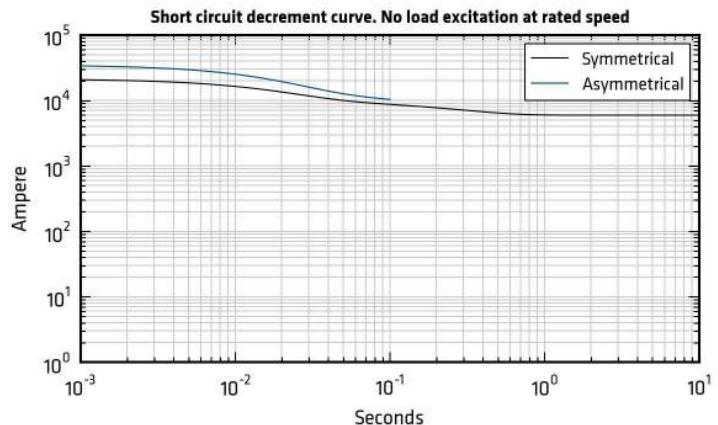


ECO43 VL4 A

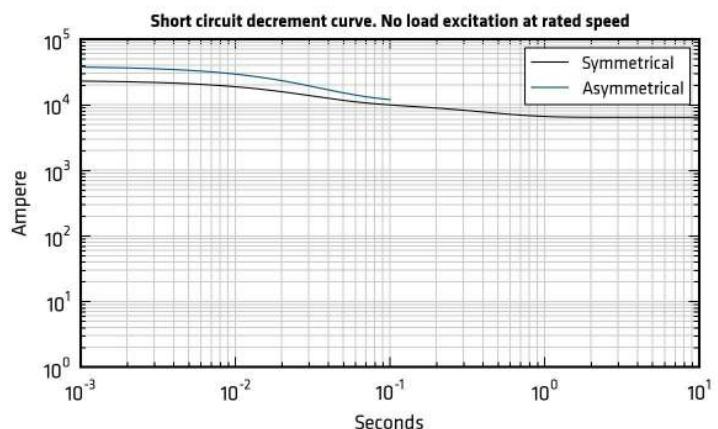


*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed


ECO43 1S4 A

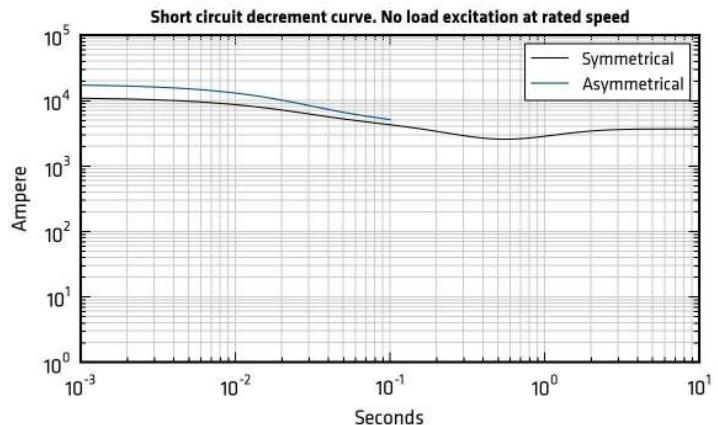


ECO43 2S4 A

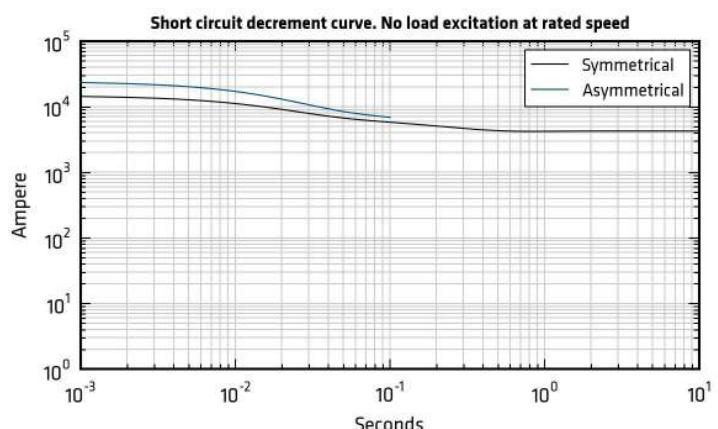

ECO43 1M4 A

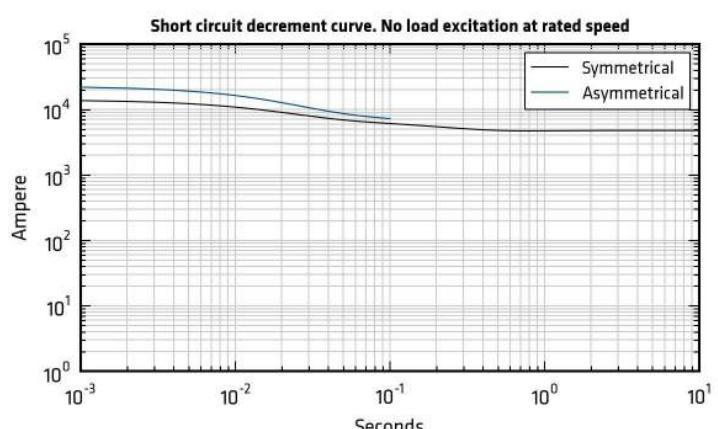


ECO43 2M4 A

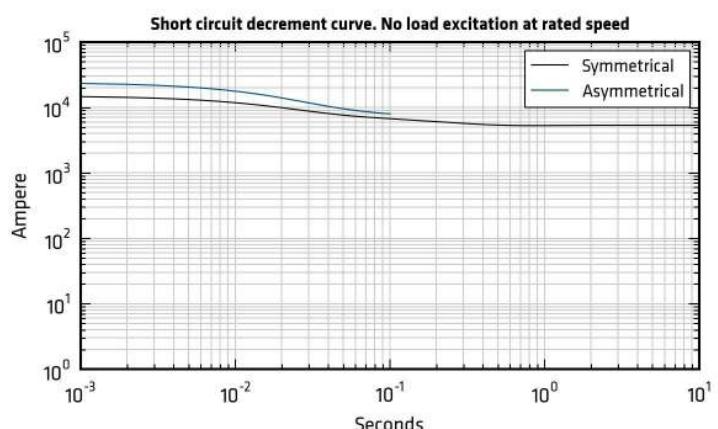


*Please refer to tables at page 6

60Hz Short circuit decrement curves - No load excitation at rated speed

ECO43 2L4 A

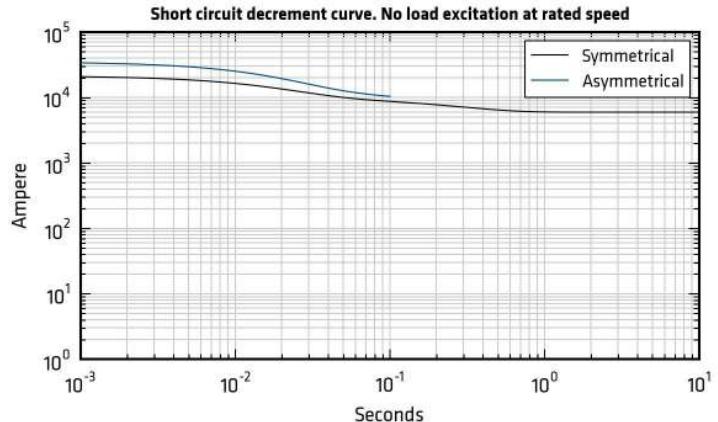

ECO43 VL4 A

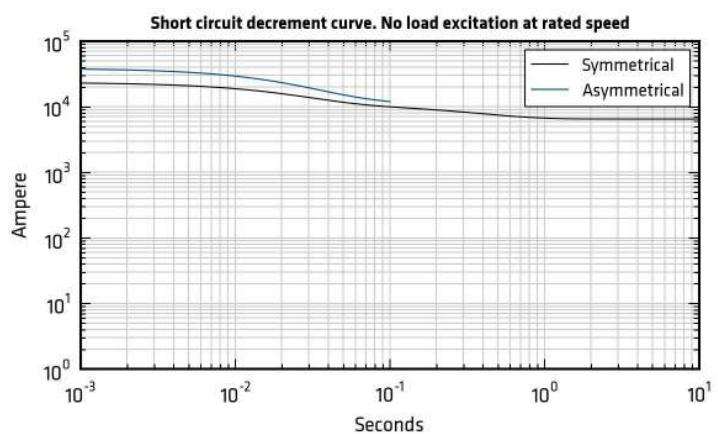


*Please refer to tables at page 6

Additional Characteristics


Data	ECO43 1S4 A		ECO43 2S4 A		ECO43 1M4 A		ECO43 2M4 A		ECO43 2L4 A		ECO43 VL4 A	
	50Hz	60Hz										
Damper cage	Copper											
Stator Winding Resistance (20°C)	Ω		0,011		0,009		0,01		0,008		0,006	
Rotor Winding Resistance (20°C)	Ω		2,1		2,3		2,325		2,5		2,8	
Stator Exciter Resistance (20°C)	Ω		10,63		10,63		10,63		10,63		10,63	
Rotor Exciter Resistance (20°C)	Ω		0,13		0,13		0,13		0,13		0,13	
Weight of complete generator	kg		1920,0		2140,0		2275,0		2370,0		2700,0	
Unbalanced magnetic pull	kN/mm		5,0		5,7		5,4		5,0		5,9	
Air flow	m³/min		90,0		108,0		90,0		108,0		90,0	
Noise level at 1m/7m	dB(A)		95/84		99/89		95/84		99/89		95/84	

PQ Diagram

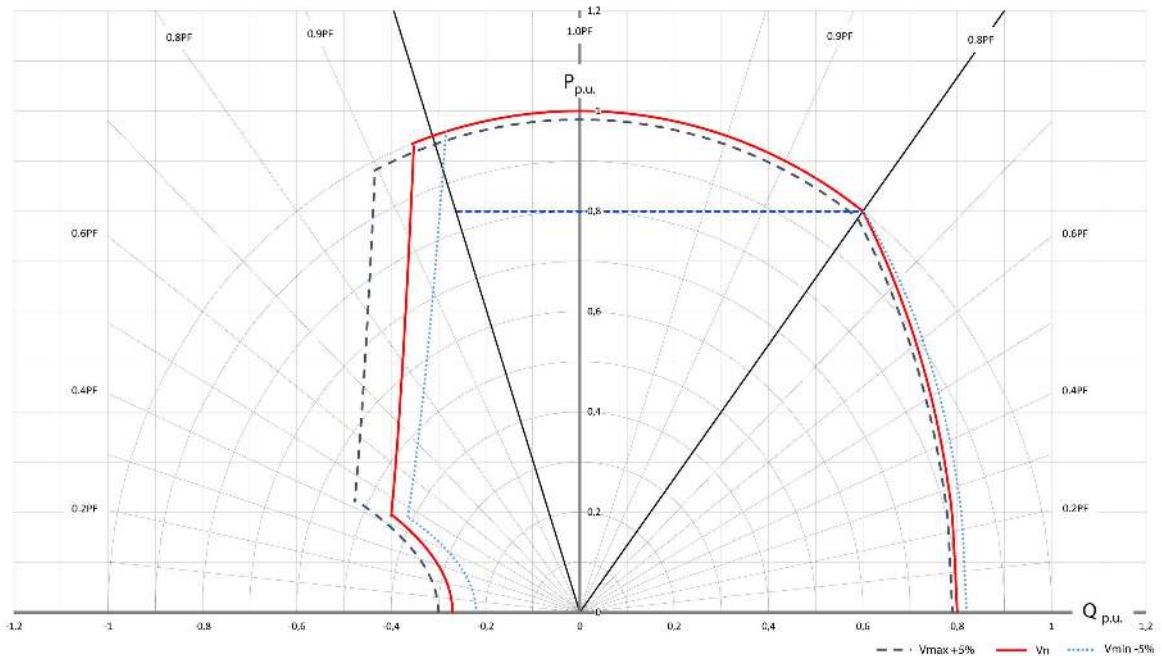


ECO43 154 A

TWO BEARING MOMENTS OF INERTIA

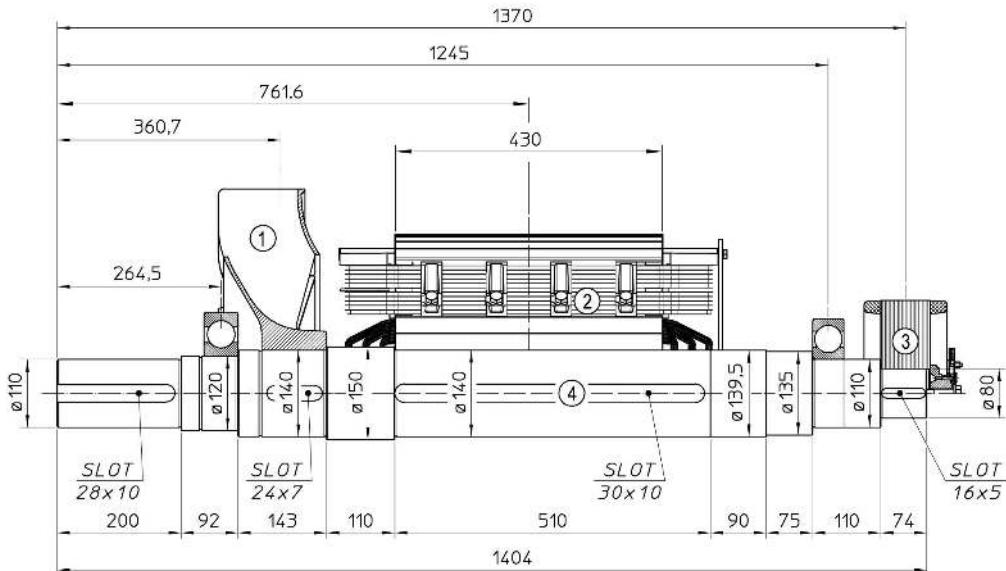

POS.	COMPONENT	WEIGHT (kg)	J (kgm^2)
1	FAN	26.2	1.0289
2	MAIN ROTOR	476.5	13.7333
3	EX. ROTOR	40.1	0.4889
4	SHAFT	144.3	0.3242
TOTAL		687.1	15.5753


TWO BEARING DIMENSIONS

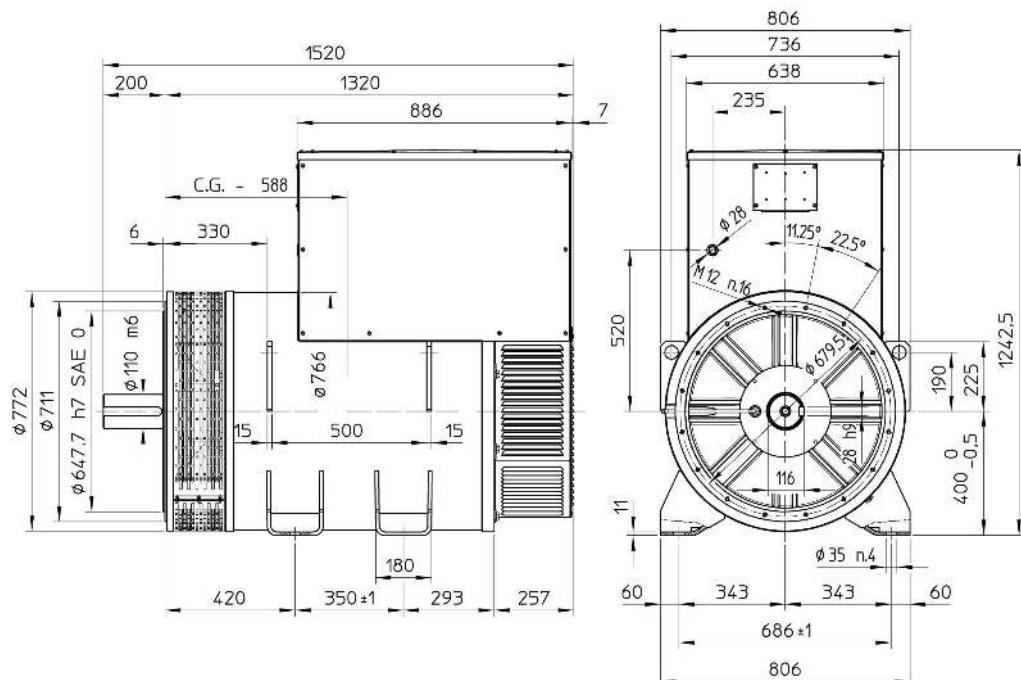


C.G.= GRAVITY CENTER

ECO43 154 A

SINGLE BEARING MOMENTS OF INERTIA

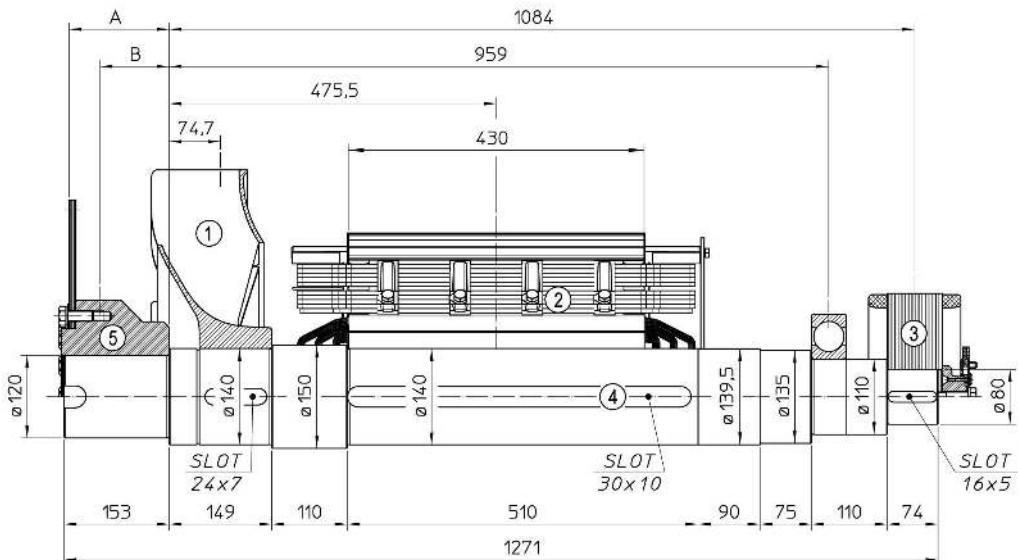


SINGLE BEARING DIMENSIONS

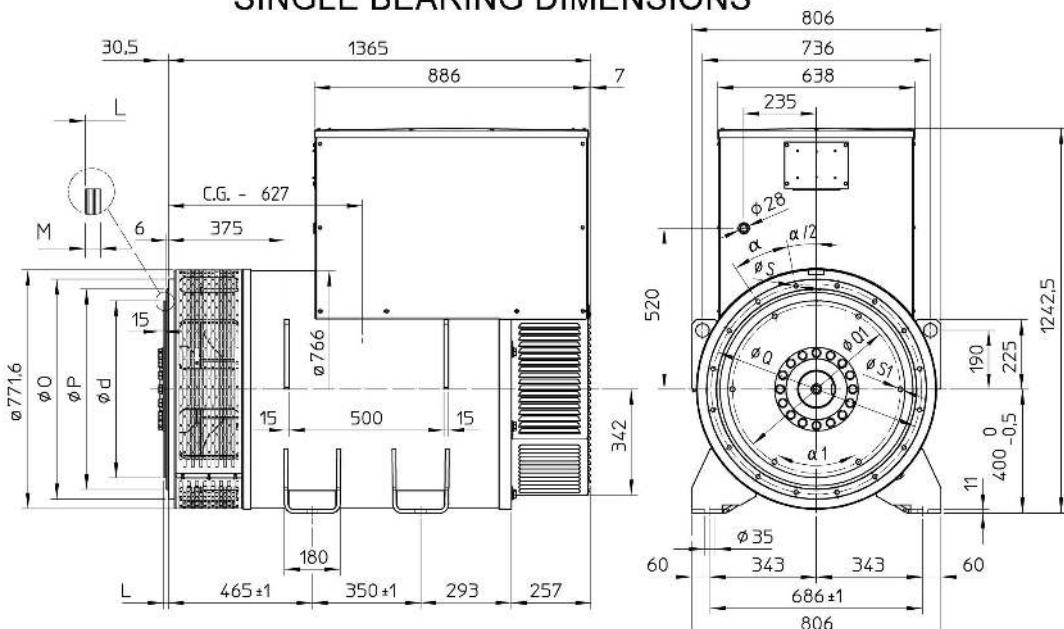

C.G.= GRAVITY CENTER


EC043 254 A

TWO BEARING MOMENTS OF INERTIA

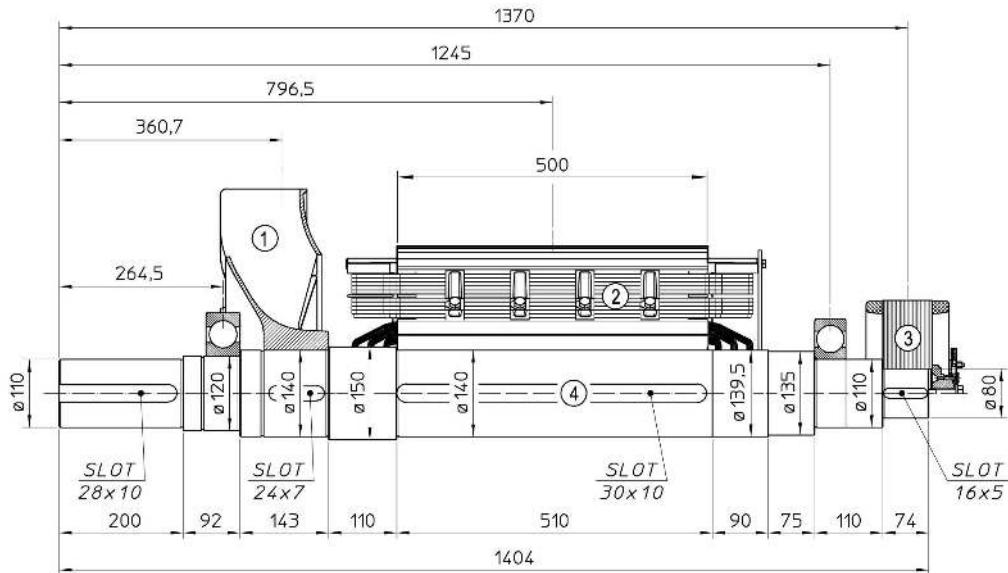

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	26.2	1.0289
2	MAIN ROTOR	545.5	15.6937
3	EX. ROTOR	40.1	0.4889
4	SHAFT	144.3	0.3242
	TOTAL	756.1	17.5357


TWO BEARING DIMENSIONS

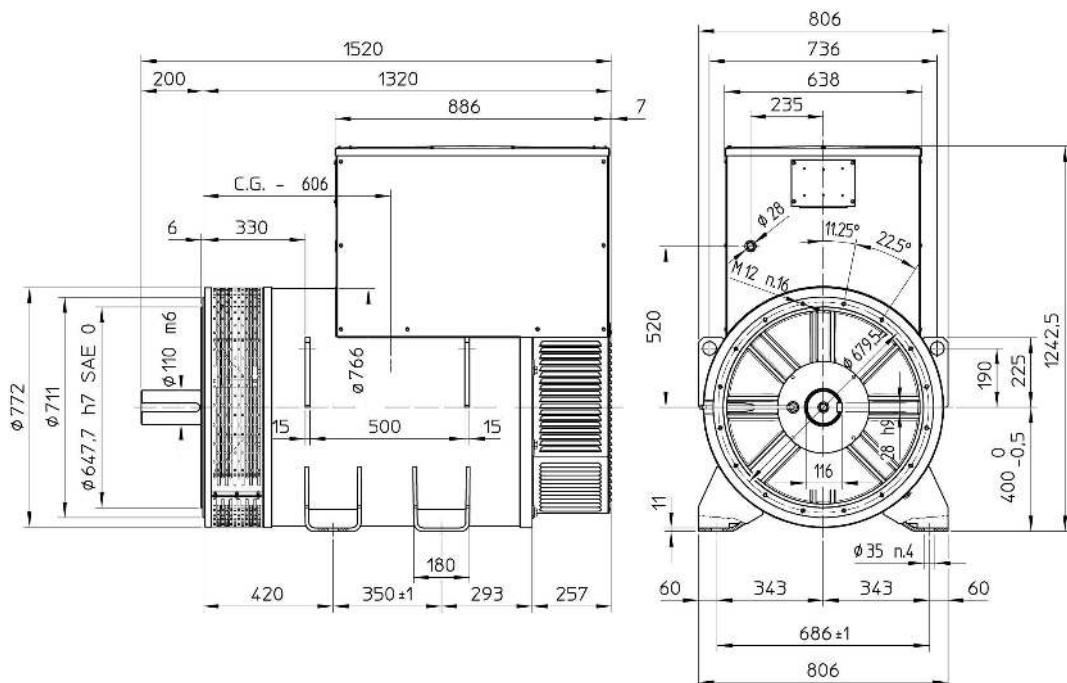

C.G.= GRAVITY CENTER

EC043 254 A


SINGLE BEARING MOMENTS OF INERTIA

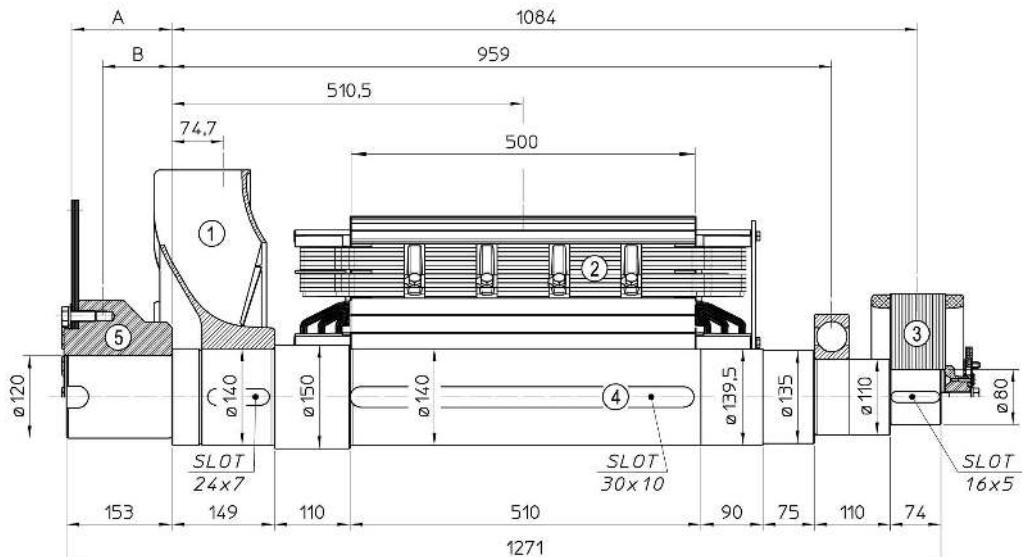

POS.	COMPONENT	WEIGHT (kg)	J (kgm^2)
1	FAN	26.2	1.0289
2	MAIN ROTOR	545.5	15.8937
3	EX. ROTOR	40.1	0.4889
4	SHAFT	135.9	0.3141
	TOTAL	747.7	17.5256

POS.	COMPONENT	SAE N°	A	B	WEIGHT (kg)	J (kgm ²)
5	SHAFTS COUPLING	14	155.7	99.5	56.5	0.8261
	FLEX PLATE	18	145.7	100.7	60.9	1.2458
		21	130.0	98.5	69.0	2.2332

SINGLE BEARING DIMENSIONS

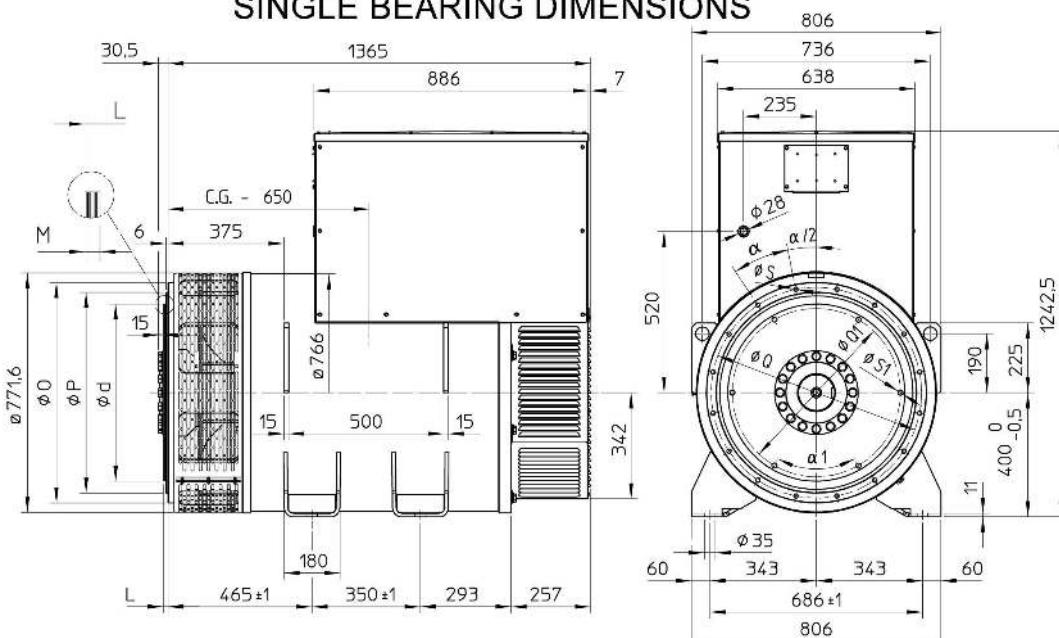


SAE N.	FLANGA/FLANGF BRIDENANSCH				
	O	P	Q	S	α
1	711	511.2	530.2	12	30°
0	711	647.7	679.5	14	22.5°
00	883	787.4	850.9	14	22.5°

SAE N.	GIUNTA DISCHI / DISC COUPLING					
	DISQUE DE MONOPAIRE / SCHIEBENKUPPLUNG					
	d	L	M	Q1	S1	α_1
14	466.72	25.4	10	438.15	13.5	45°
18	571.5	15.7	10	542.9	16.5	60°
21	673.1	0	12	641.35	16.5	30°


C.G.= GRAVITY CENTER

ECO43 1M4 A

TWO BEARING MOMENTS OF INERTIA

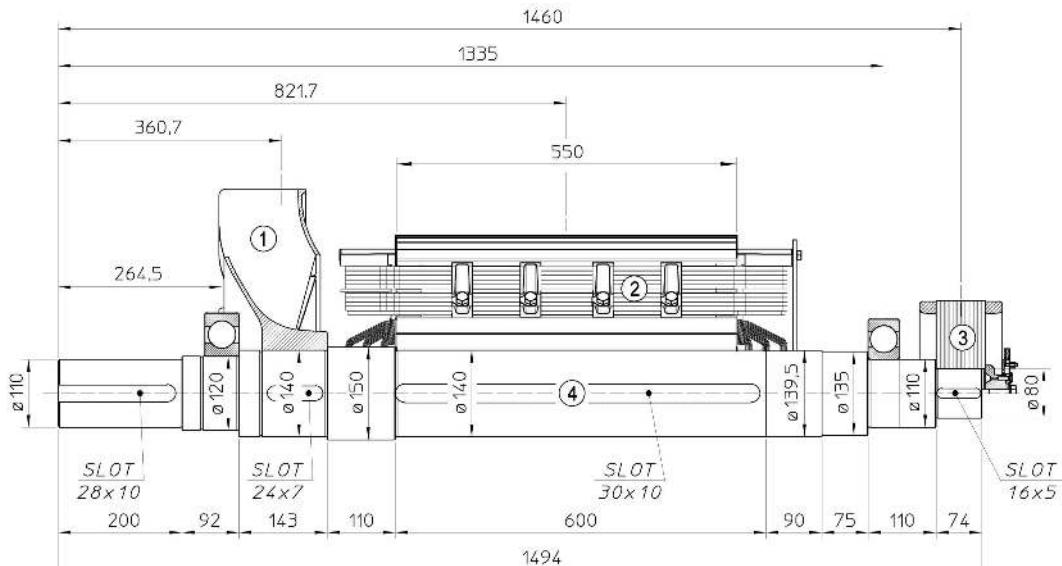


TWO BEARING DIMENSIONS

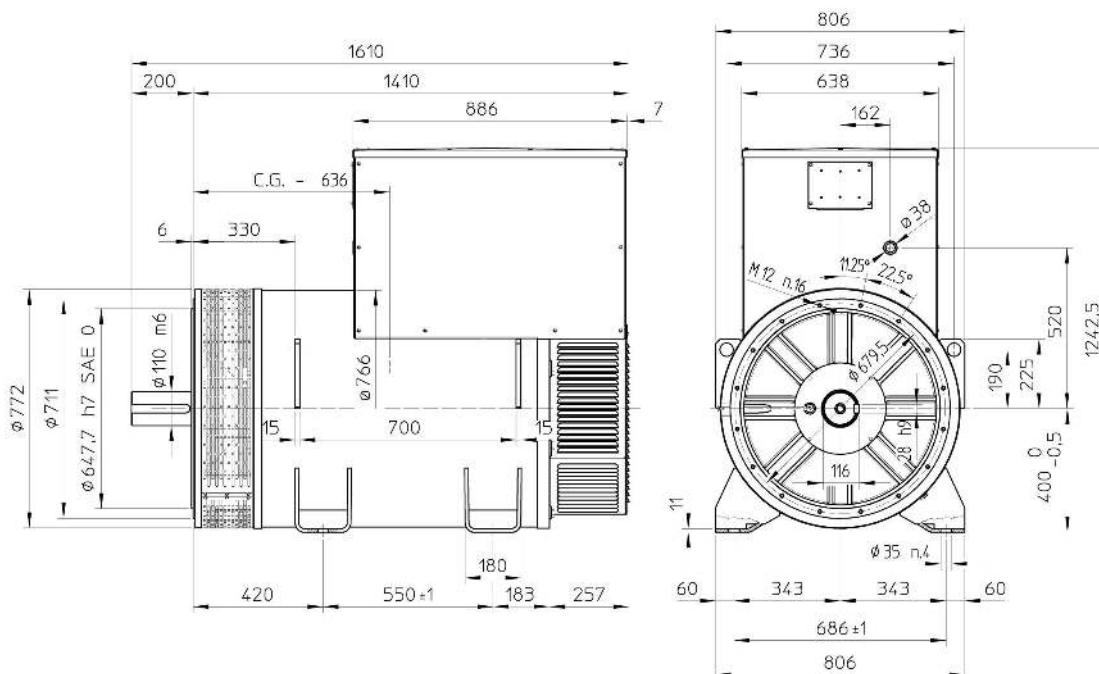

EC043 1M4 A


SINGLE BEARING MOMENTS OF INERTIA

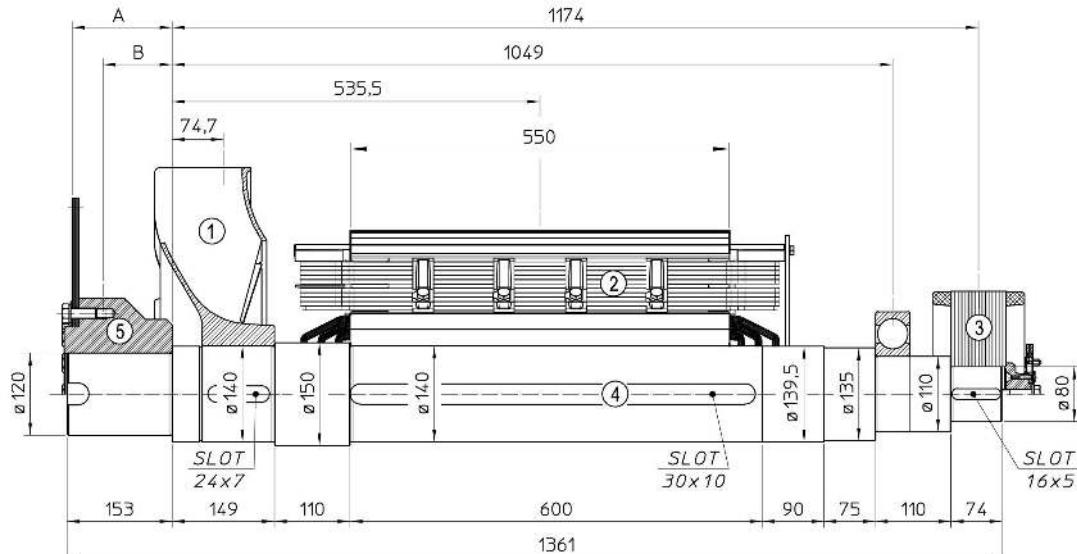

POS.	COMPONENT	WEIGHT (kg)	J (kgm^2)
1	FAN	26.2	1.0289
2	MAIN ROTOR	593.3	17.0460
3	EX. ROTOR	40.1	0.4889
4	SHAFT	146.5	0.3397
	TOTAL	806.1	18.9035

POS.	COMPONENT	SAE N°	A	B	WEIGHT (kg)	J (kgm ²)
5	SHAFTS COUPLING	14	155.7	99.5	56.5	0.8261
	FLEX PLATE	18	145.7	100.7	60.9	1.2458
		21	130.0	98.5	69.0	2.2332

SINGLE BEARING DIMENSIONS

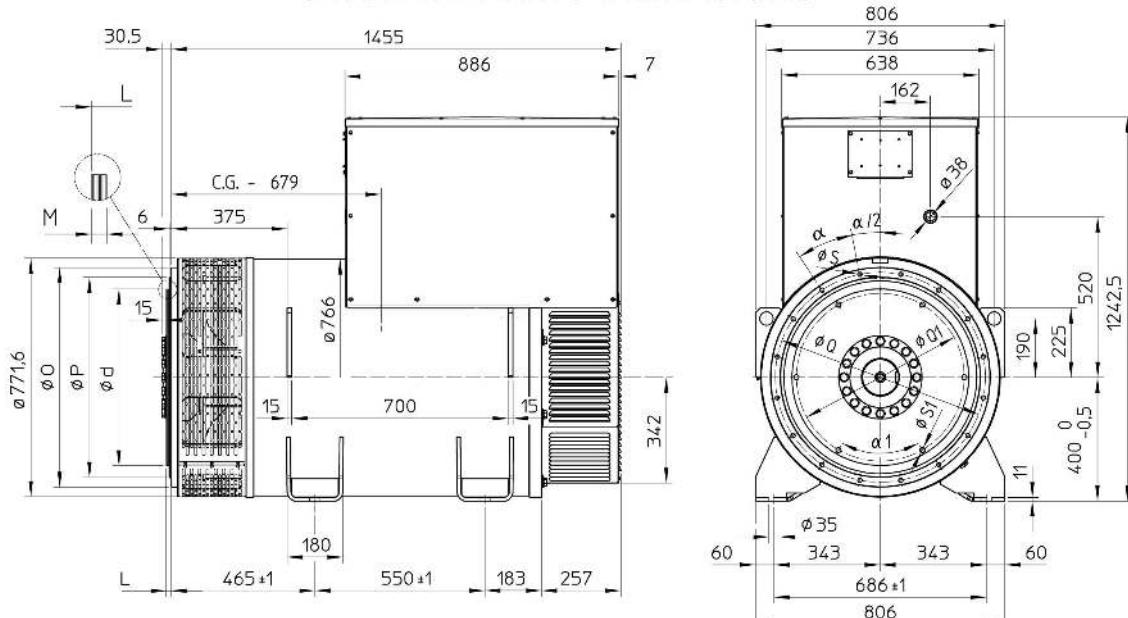


SAE N.	FLANGE/FLANGE BRIDE/PLANSCH				
	O	P	Q	S	α
1	711	511.2	530.2	12	30°
0	711	647.7	679.5	14	22.5°
00	883	787.4	850.9	14	22.5°

SAE N.	GIUNTI A DISCHI / DISC COUPLING DISQUE DE MONOPAIRE / SCHAFFERKUPPLUNG						
	d	L	M	Q1	S1	S2	α1
14	466.72	25.4	10	438.15	13.5	45°	
18	571.5	15.7	10	542.92	16.5	60°	
21	673.1	0	12	641.35	16.5	30°	


C.G.= GRAVITY CENTER

ECO43 2M4 A

TWO BEARING MOMENTS OF INERTIA


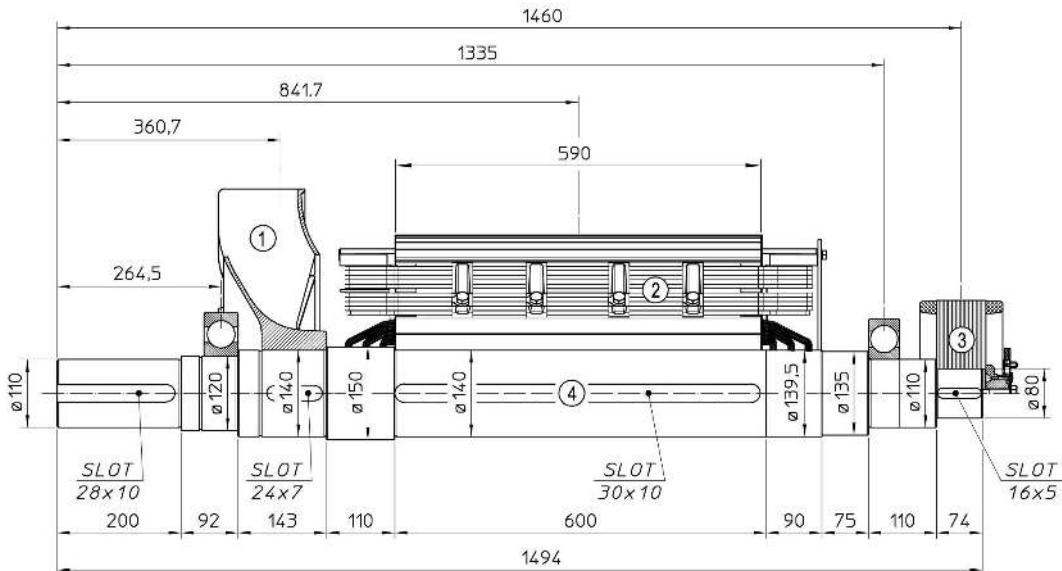


TWO BEARING DIMENSIONS

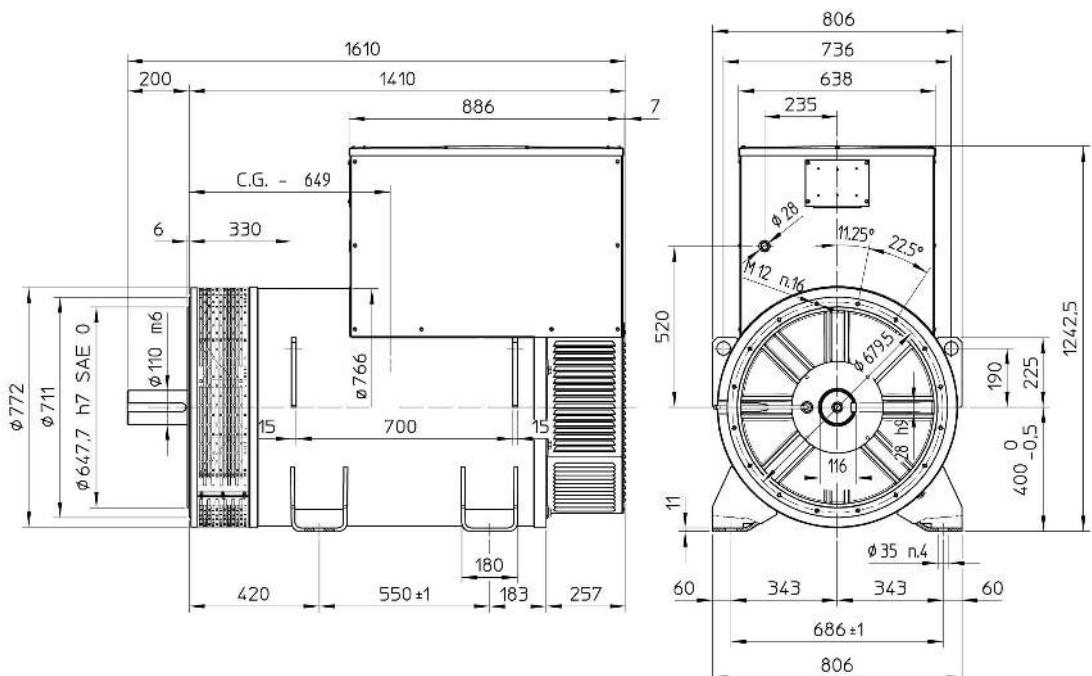


C.G.= GRAVITY CENTER

ECO43 2M4 A

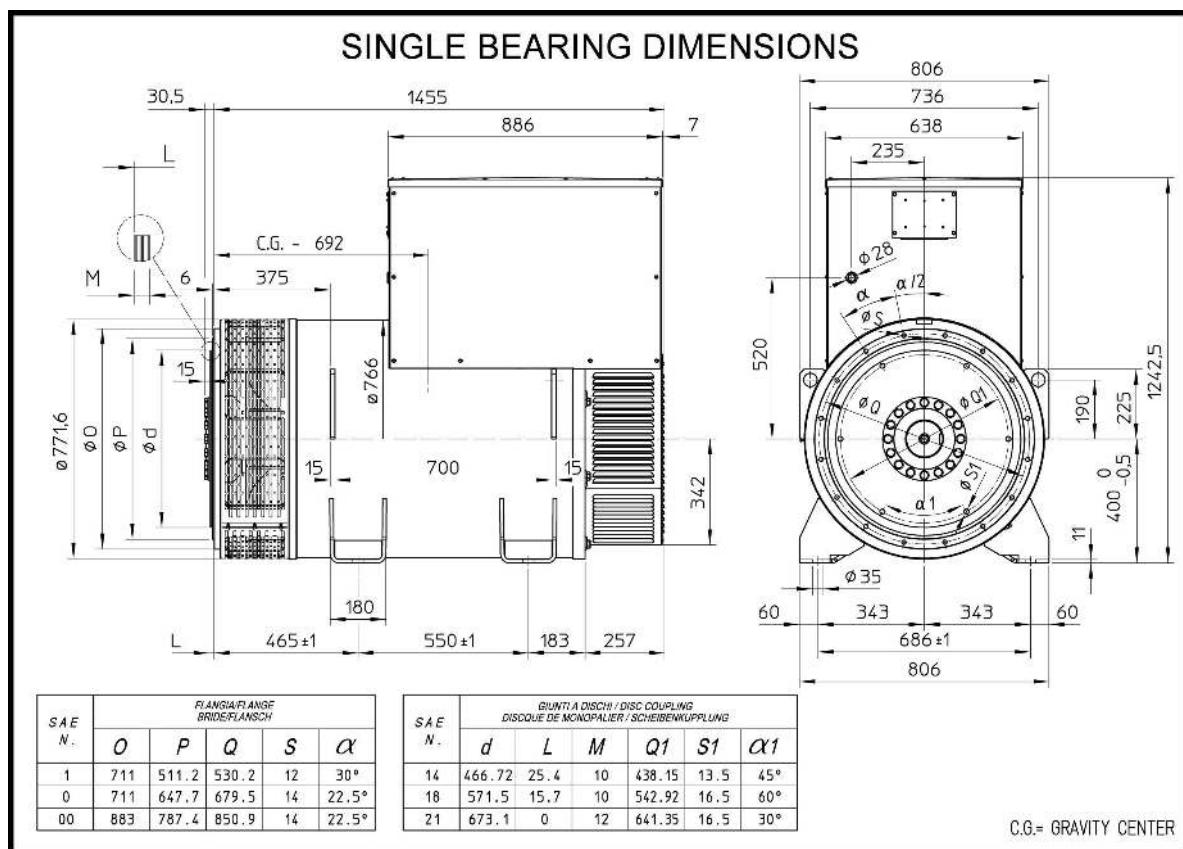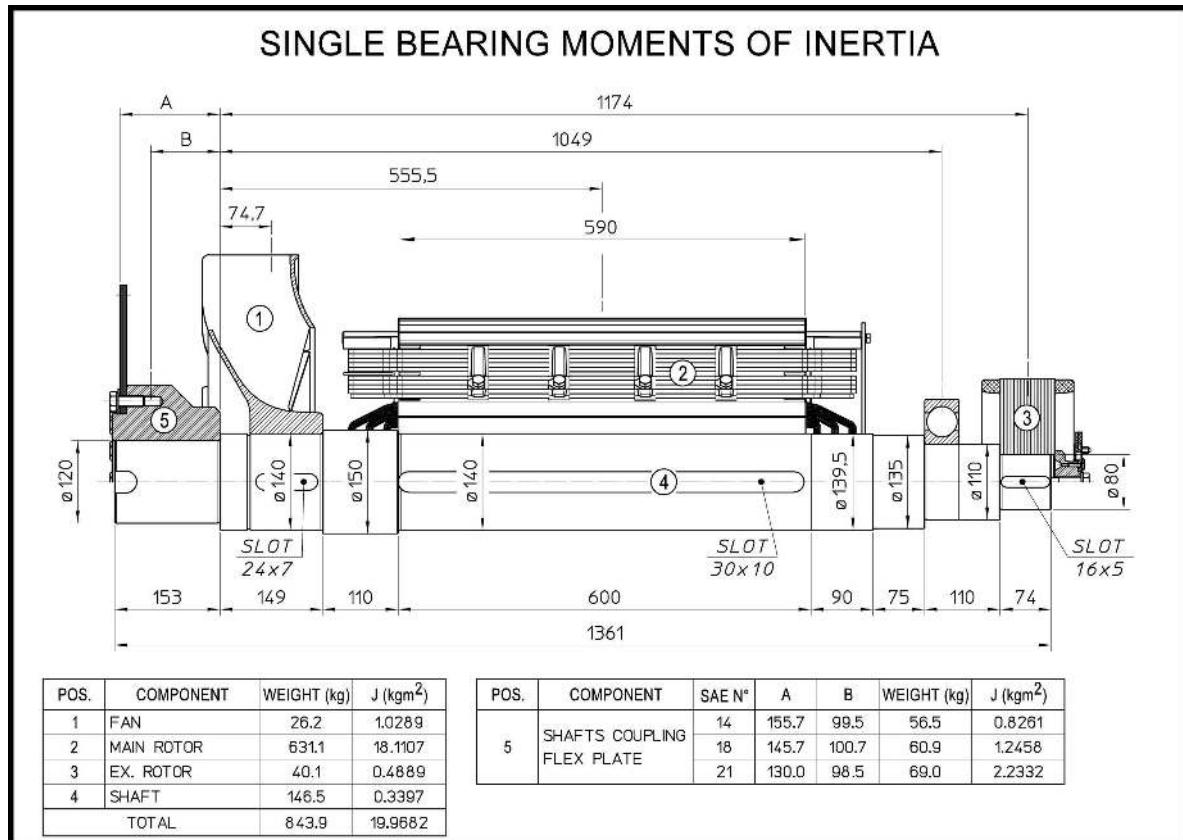


ECO43 2L4 A

TWO BEARING MOMENTS OF INERTIA

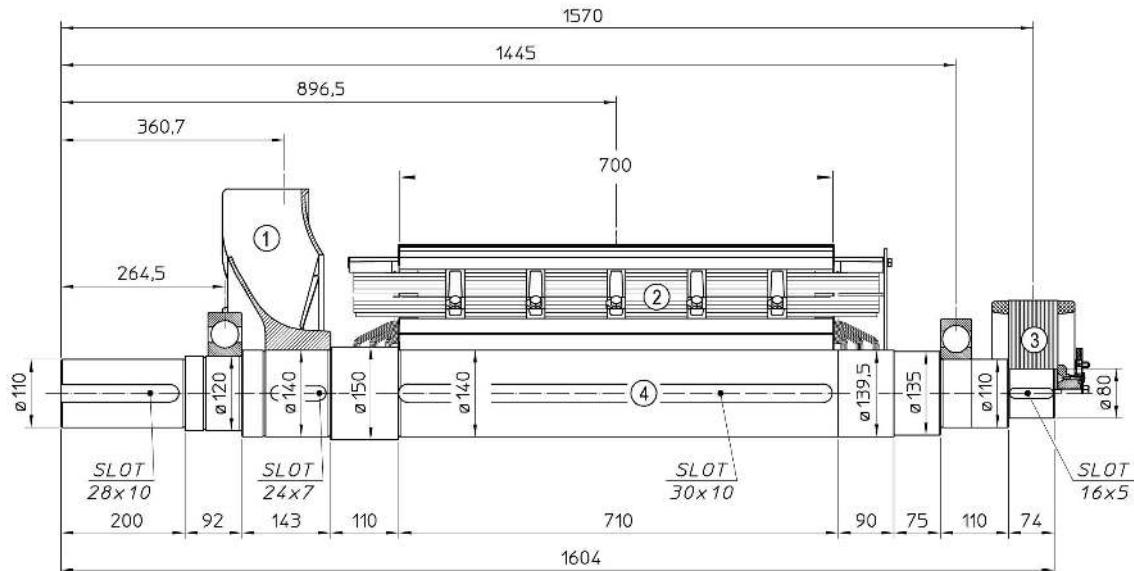

POS.	COMPONENT	WEIGHT (kg)	$J (\text{kgm}^2)$
1	FAN	26.2	1.0289
2	MAIN ROTOR	739.2	21.1818
3	EX. ROTOR	40.1	0.4889
4	SHAFT	167.8	0.3811
TOTAL		973.3	23.0807


TWO BEARING DIMENSIONS

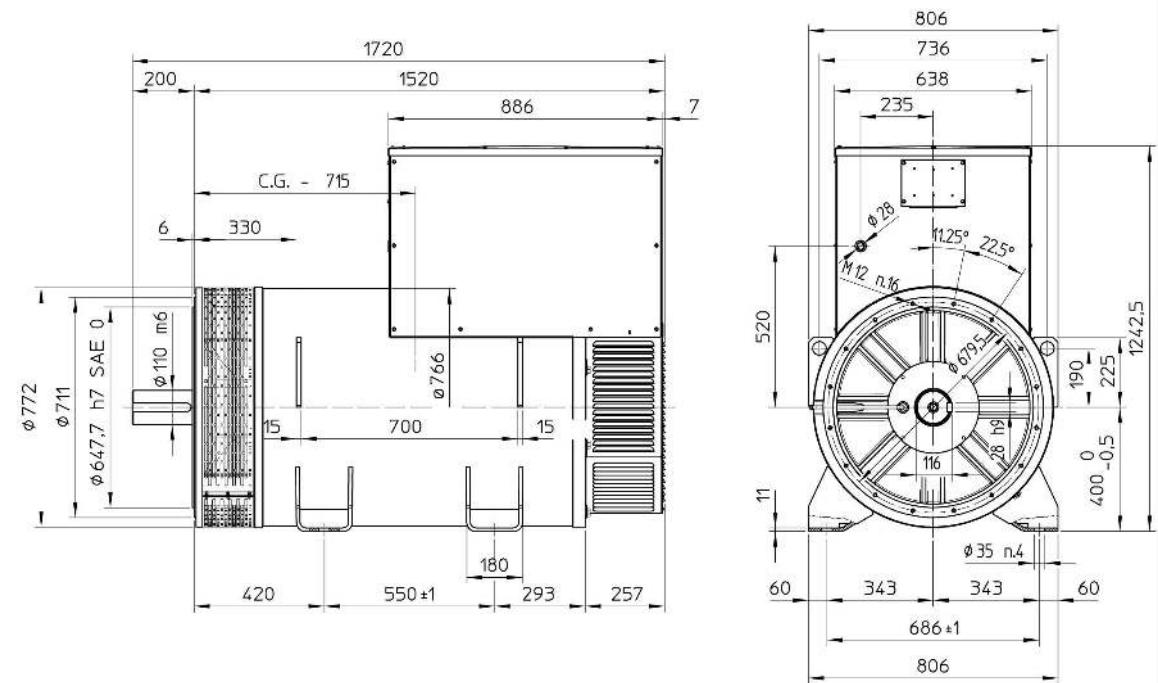

C.G.= GRAVITY CENTER

ECO43 2L4 A


SINGLE BEARING MOMENTS OF INERTIA

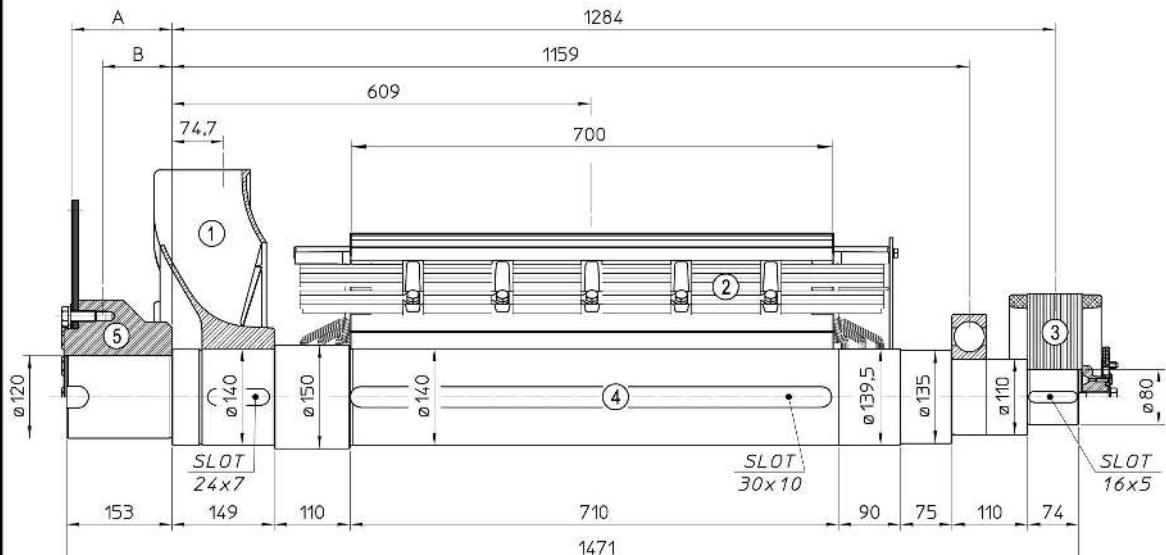

POS.	COMPONENT	WEIGHT (kg)	J (kgm ²)
1	FAN	26.2	1.0289
2	MAIN ROTOR	739.2	21.1818
3	EX. ROTOR	40.1	0.4889
4	SHAFT	159.5	0.3710
TOTAL		965.0	23.0706

POS.	COMPONENT	SAE N°	A	B	WEIGHT (kg)	J (kgm ²)
5	SHAFTS COUPLING FLEX PLATE	14	155.7	99.5	56.5	0.8261
		18	145.7	100.7	60.9	1.2458
		21	130.0	98.5	69.0	2.2332

SINGLE BEARING DIMENSIONS

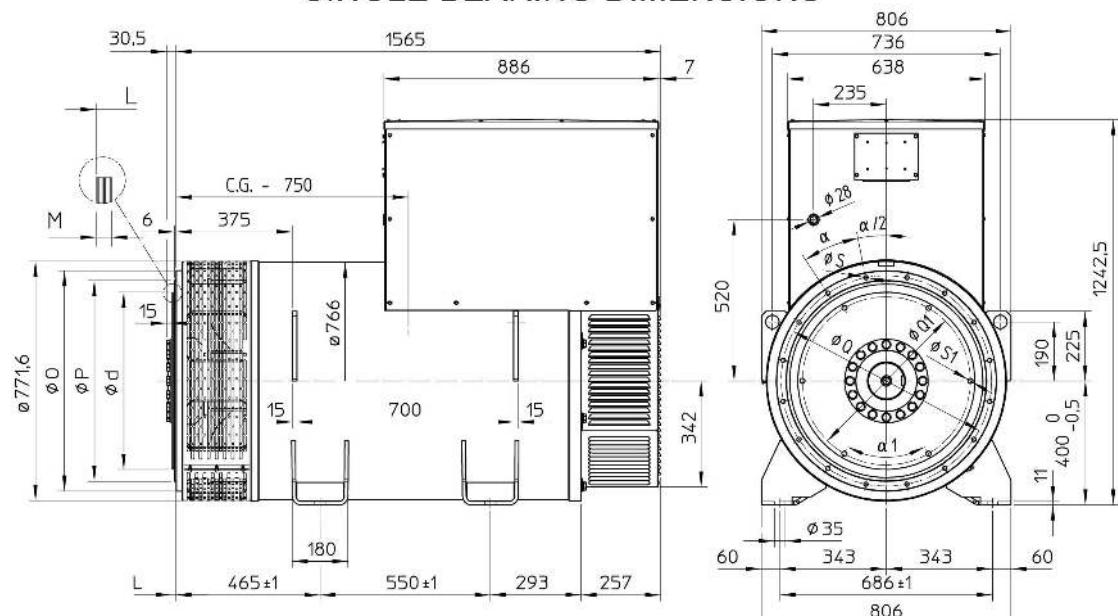


SAE N.	PIANGIA FLANGE BRIDGEFLANSCH				
	O	P	Q	S	α
1	711	511.2	530.2	12	30°
0	711	647.7	679.5	14	22.5°
00	883	787.4	850.9	14	22.5°

SAE N.	GIUNTA DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHIEBENKUPPLUNG					
	d	L	M	Q1	S1	α1
14	466.72	25.4	10	438.15	13.5	45°
18	571.5	15.7	10	542.92	16.5	60°
21	673.1	0	12	641.35	16.5	30°

C.G.= GRAVITY CENTER


ECO43 VL4 A

TWO BEARING MOMENTS OF INERTIA

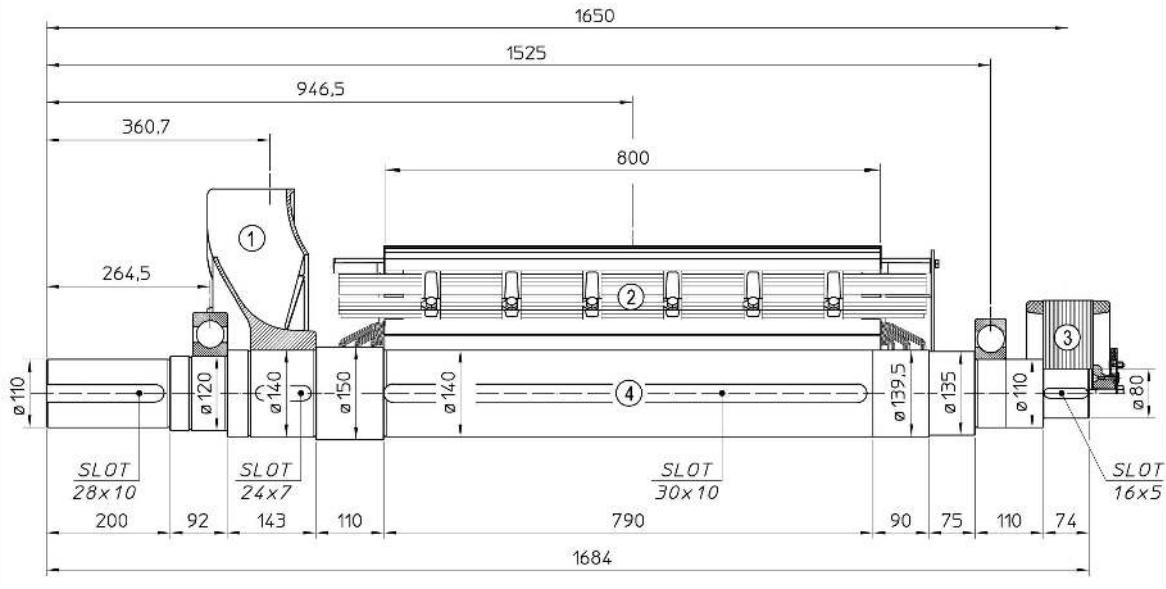

POS.	COMPONENT	WEIGHT (kg)	J (kgm^2)
1	FAN	26.2	1.0289
2	MAIN ROTOR	841.2	24.0977
3	EX. ROTOR	40.1	0.4889
4	SHAFT	177.3	0.4039
	TOTAL	1084.8	26.0194


TWO BEARING DIMENSIONS

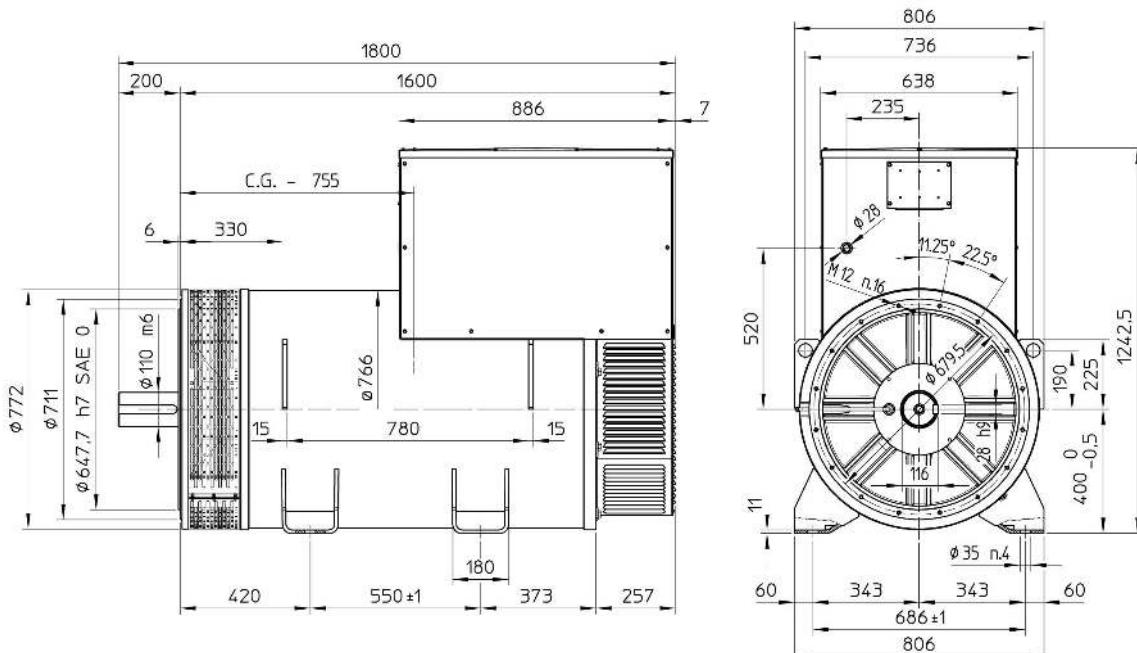


C.G.= GRAVITY CENTER

ECO43 VL4 A

SINGLE BEARING MOMENTS OF INERTIA

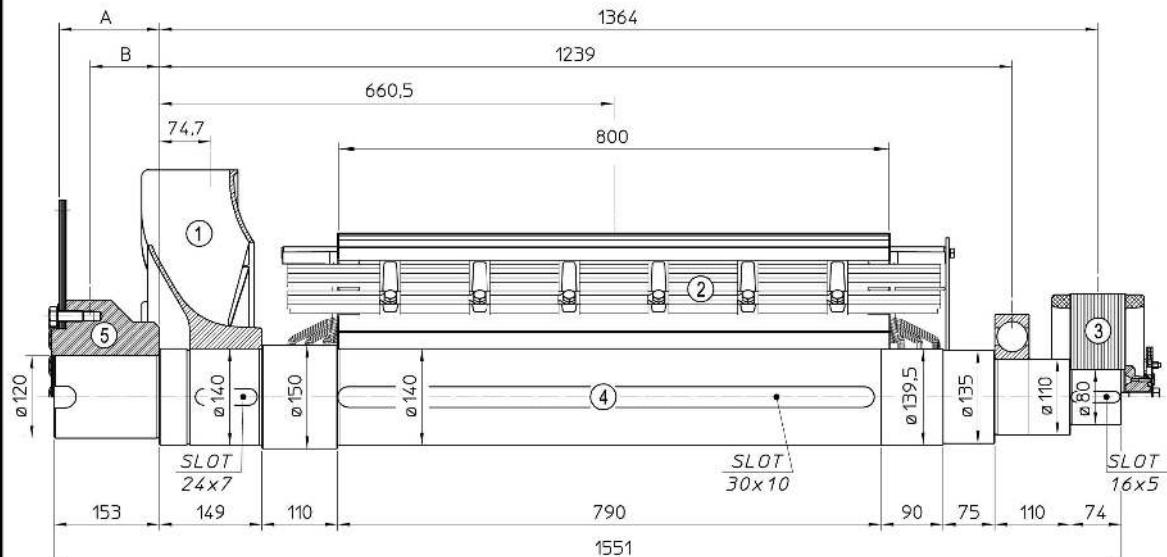

SINGLE BEARING DIMENSIONS

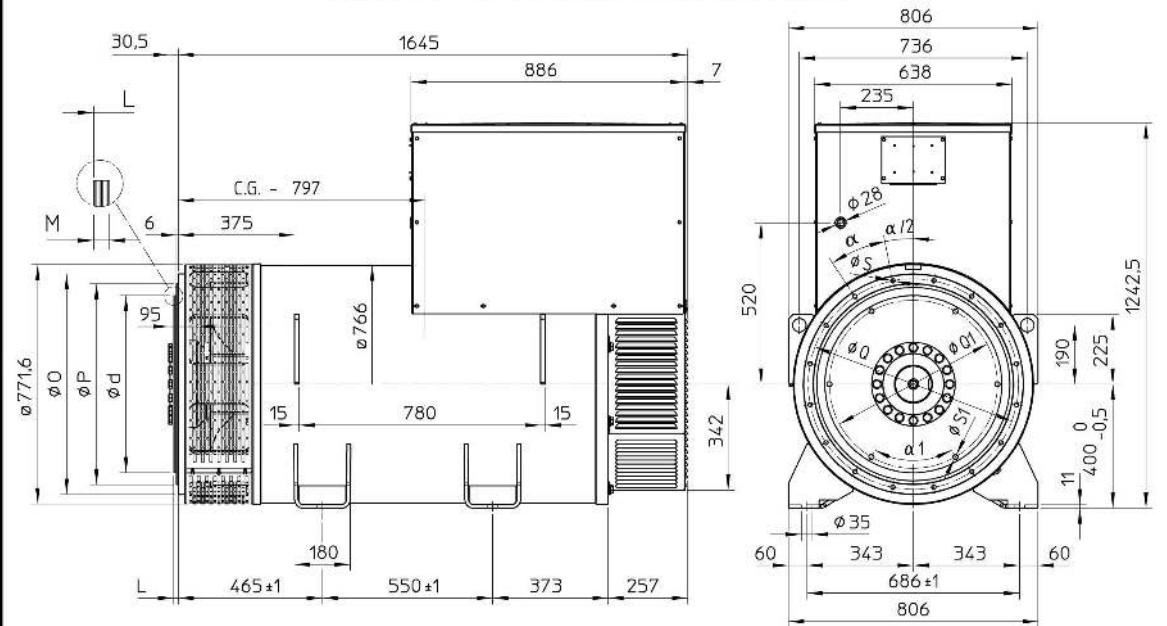

C.G.= GRAVITY CENTER