

Incremental encoders

Standard stainless steel, optical


Sendix 5006 / 5026 (shaft / hollow shaft)

Push-pull / RS422



The incremental Sendix encoders 5006 / 5026 in stainless steel offers optimum material resistance and thus virtually unlimited durability.

The high-grade seals, the IP66/IP67 level of protection as well as the wide temperature range additionally ensure impermeability and ruggedness.

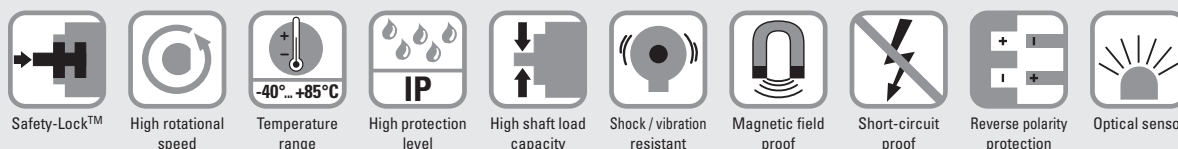

Durable and sealed

- Protection rating IP66/IP67.
- Rugged stainless steel housing.
- Wide temperature range -40 ... +85°C.
- Sturdy bearing construction in Safety Lock™ Design for resistance against vibration and installation errors.

Flexible in use

- Compatible with all common US and european standards.
- Power supply 5 ... 30 V DC, various interface options, max. 5000 pulses per revolution.
- Compact dimensions: outer diameter 50 mm, installation depth max. 47 mm.

Order code Shaft version

8.5006 . **XXXX4** . **XXXX**
Type a b c d e

a Flange

- 7 = clamping flange ø 58 mm [2.28"]
- A = synchro flange ø 58 mm [2.28"]
- C = square flange □ 63.5 mm [2.5"]

b Shaft (ø x L), with flat

- 1 = ø 6 x 10 mm [0.24 x 0.39"]
- 3 = ø 10 x 20 mm [0.39 x 0.79"]
- 8 = ø 3/8" x 7/8"

c Output circuit / power supply

- 2 = push-pull (7272 compatible with inverted signal) / 5 ... 30 V DC
- 5 = push-pull (with inverted signal) / 10 ... 30 V DC
- 4 = RS422 (with inverted signal) / 5 V DC

d Type of connection

- 4 = radial M12 connector, 8-pin

e Pulse rate

- 1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulses => 0100)

Optional on request

- other pulse rates
- Ex 2/22
- seawater resistant (stainless steel V4A)

Stainless steel V4A as standard types (deliverable as from 1 unit)

V4A 8.5006.73X4.XXXX-V4A
1.4404

Order code Hollow shaft

8.5026 . **XXXX2** . **XXXX**
Type a b c d e

a Flange

- 1 = with spring element, long
- C = with stator coupling, ø 63 mm

b Through hollow shaft

- 2 = ø 1/4"
- 4 = ø 3/8"
- 3 = ø 10 mm [0.39"]
- 5 = ø 12 mm [0.47"]
- 6 = ø 1/2"
- 8 = ø 15 mm [0.59"]

c Output circuit / power supply

- 2 = push-pull (7272 compatible, with inverted signal) / 5 ... 30 V DC
- 5 = push-pull (with inverted signal) / 10 ... 30 V DC
- 4 = RS422 (with inverted signal) / 5 V DC

d Type of connection

- 2 = radial M12 connector, 8-pin

e Pulse rate

- 1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulses => 0100)

Optional on request

- other pulse rates
- Ex 2/22
- seawater resistant (stainless steel V4A)

Stainless steel V4A as standard types (deliverable as from 1 unit)

V4A 8.5026.18X2.XXXX-V4A
1.4404

Incremental encoders

Standard stainless steel, optical	Sendix 5006 / 5026 (shaft / hollow shaft)	Push-pull / RS422
--	--	--------------------------

Mounting accessory for hollow shaft encoders	Dimensions in mm [inch]	Order no.	
Isolation / adapter inserts for hollow shaft encoders			
Thermal and electrical isolation of the encoders (Temperature range -40 ... +115°C [-40°F ... +239°F]) Isolation inserts prevent currents from passing through the encoder bearings. These currents can occur when using inverter controlled three-phase or AC vector motors and considerably shorten the service life of the encoder bearings. In addition the encoder is thermally isolated as the plastic does not transfer the heat to the encoder.			
	Tip: By using these adapter inserts you can achieve six different hollow shaft diameters, all on the basis of the encoder 8.5026.X8X2.XXXX.		
		D1	Isolation insert
		6 mm [0.24"]	8.0010.4021.0000
	8 mm [0.32"]	8.0010.4020.0000	
	10 mm [0.39"]	8.0010.4023.0000	
	12 mm [0.47"]	8.0010.4025.0000	
	1/4"	8.0010.4022.0000	
	3/8"	8.0010.4024.0000	
	1/2"	8.0010.4026.0000	

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data

Electrical characteristics			
Output circuit	RS422 (TTL compatible)	Push-pull	Push-pull (7272 compatible)
Power supply	5 V DC (±5 %)	10 ... 30 V DC	5 ... 30 V DC
Current consumption with inverted signal (no load)	typ. 40 mA max. 90 mA	typ. 50 mA max. 100 mA	typ. 50 mA max. 100 mA
Permissible load / channel	max. +/- 20 mA	max. +/- 20 mA	max. +/- 20 mA
Pulse frequency	max. 300 kHz	max. 300 kHz	max. 300 kHz
Signal level	HIGH min. 2.5 V LOW max. 0.5 V	min +V - 1.0 V max. 0.5 V	min. +V - 2.0 V max. 0.5 V
Rising edge time t_r	max. 200 ns	max. 1 µs	max. 1 µs
Falling edge time t_f	max. 200 ns	max. 1 µs	max. 1 µs
Short circuit proof outputs¹⁾	yes ²⁾	yes	yes
Reverse polarity protection of the power supply	no	yes	no
UL approval	file 224618		
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU		

Mechanical characteristics	
Maximum speed³⁾	6000 min ⁻¹
Mass moment of inertia	approx. 1.8 x 10 ⁻⁶ kgm ²
Starting torque – at 20°C [68°F]	< 0.05 Nm
Weight	approx. 0.4 kg [14.11 oz]
Load capacity of shaft	radial 80 N axial 40 N
Protection acc. to EN 60529	IP66 / IP67
Working temperature	-40°C ... +85°C [-40°F ... +185°F]
Material	housing, flange, shaft stainless steel, 1.4305 (V2A) connector stainless steel
Shock resistance acc. to EN 60068-2-27	2500 m/s ² , 6 ms
Vibration resistance acc. to EN 60068-2-6	100 m/s ² , 10 ... 2000 Hz

1) If power supply correctly applied.
 2) Only one channel allowed to be shorted-out:
 at +V = 5 V DC, short-circuit to channel, 0 V, or +V is permitted.
 at +V = 5 ... 30 V DC, short-circuit to channel or 0 V is permitted.
 3) For continuous operation max. 3000 min⁻¹.

Incremental encoders

**Standard
stainless steel, optical**

Sendix 5006 / 5026 (shaft / hollow shaft)


Push-pull / RS422

Terminal assignment

Output circuit	Type of connection	M12 connector, 8-pin									
2, 4, 5	5006: 4	Signal:	0 V	+V	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	\perp
	5026: 2	Pin:	1	2	3	4	5	6	7	8	PH ¹⁾

+V: Encoder power supply +V DC
 0 V: Encoder power supply ground GND (0 V)
 A, \bar{A} : Incremental output channel A
 B, \bar{B} : Incremental output channel B
 0, $\bar{0}$: Reference signal
 PH \perp : Plug connector housing (shield)

Top view of mating side, male contact base




M12 connector, 8-pin

Dimensions shaft version

Dimensions in mm [inch]

Synchro flange, \varnothing 58 [2.28] Flange type A


1 3 x M4, 6 [0.24] deep

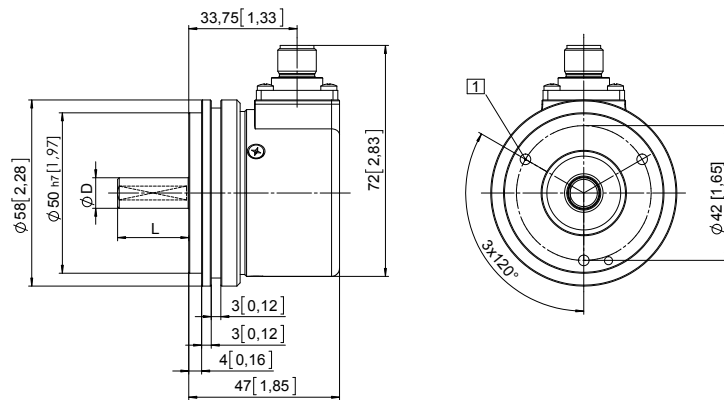

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
3/8"	h8	7/8"


Clamping flange, \varnothing 58 [2.28] Flange type 7

1 3 x M3, 5.5 [0.22] deep

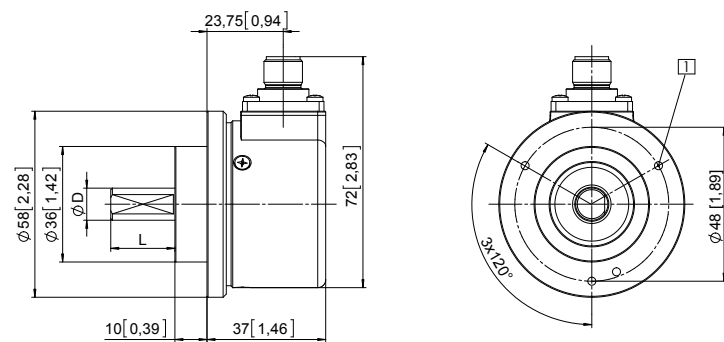

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
3/8"	h8	7/8"

Square flange, \square 63.5 [2.5] Flange type C

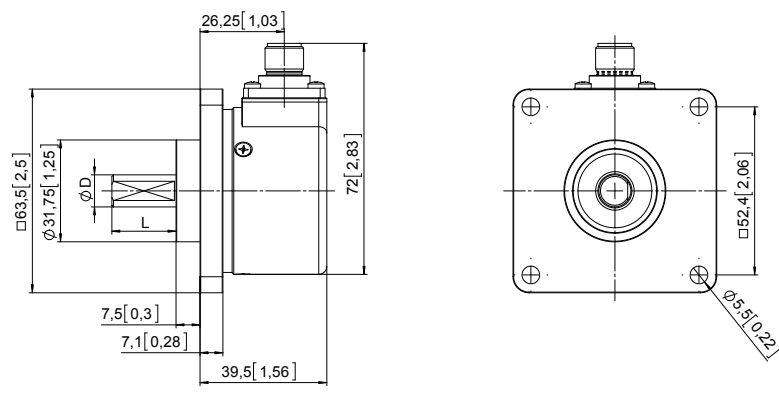

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
3/8"	h8	7/8"

1) PH = shield is attached to connector housing.

Incremental encoders

Standard stainless steel, optical	Sendix 5006 / 5026 (shaft / hollow shaft)	Push-pull / RS422
--	--	--------------------------



Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with spring element, long Flange type 1

- 1 3 x M3, 6 [0.24] deep
- 2 Slot spring element, recommendation: cylindrical pin DIN 7, \varnothing 4 [0.16]
- 3 Recommended torque for the clamping ring 0.6 Nm



D	Fit
10 [0.39]	H7
12 [0.47]	H7
15 [0.99]	H7
1/4"	H7
3/8"	H7
1/2"	H7

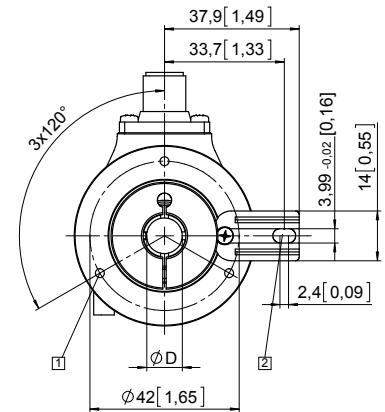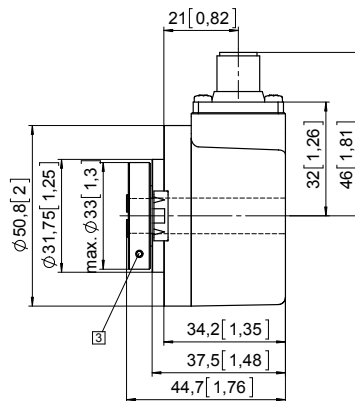

Flange with stator coupling, \varnothing 63 [2.48] Flange type C

- 1 Recommended torque for the clamping ring 0.6 Nm

D	Fit
10 [0.39]	H7
12 [0.47]	H7
15 [0.99]	H7
1/4"	H7
3/8"	H7
1/2"	H7

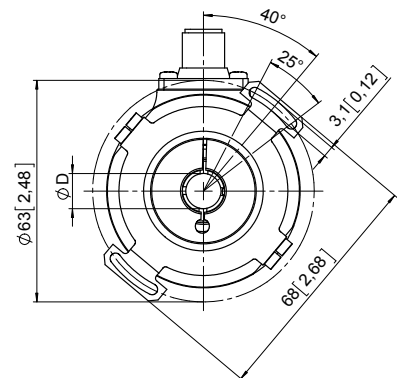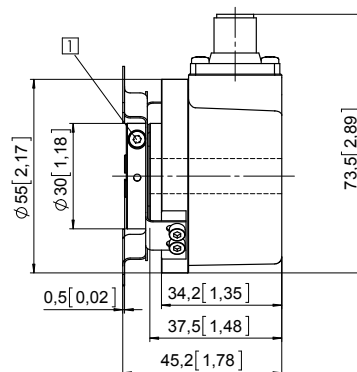

Incremental encoders